INTERIOR DESIGN PROPOSAL | GROUND FLOOR

Premium International Fashion Corporate Headquarters & Design Development Centre

Stage II Knitting Apparel Ltd. · Stage II Knitting Apparel Unit-1 · Zara Fashion

Holding 329/2, Ward 15, Vogra, Bason, Gazipur

QUALITY • COMPLIANCE • COMMITMENT

Experience centre - Blender Cycles render of the project model

PROJECT VISION

One floor that tells the story from yarn to buyer-ready collection

The face of the company: a calm, premium headquarters where buyers meet the brand, management works in comfort and the design team turns trends into products - with no production on this floor.

- Visitor journey: lobby - reception - experience centre - boardroom
- Executive suite and administration beside the visitor zone
- Design wing, staff cafe, lounge / training and prayer rooms behind

34
rooms and zones designed

54
work seats incl. growth and guests

707 sft
experience centre at the heart

75 / 75
survey dimension checks passed



Reception desk and logo wall

DESIGN PHILOSOPHY

Six principles behind every decision

01
Modernity
Clean planes, slim black-aluminium glass, an exposed and painted structure - an honest contemporary shell.

02
Functionality
Clear zoning: visitors, executives, administration, design development and staff support each have their place.

03
Collaboration
Team tables, a buyer presentation table, a sample-review counter and glass views between departments.

04
Creativity
Mood-board wall, fabric & trim library, 3D printing lab and display bays keep products and ideas visible.

05
Employee comfort
Ergonomic 1400 mm desks, acoustic felt, 4000 K task light, staff cafe, lounge and prayer rooms.

06
Professional image
The client's own logos and green, terrazzo, oak and walnut: a confident international brand presence.



ID-01 Furnished floor plan with dimensions

Ground-floor corporate office - Stage II Knitting Apparel Ltd. / Unit-1 / Zara Fashion - Holding 329/2, Ward 15, Vogra, Bason, Gazipur
Interior design proposal - not for construction - all dimensions to be verified on site

All dimensions in feet-inches from the client's hand-measured sketches (see dimension_schedule.csv).
Room 8 width, stair layouts, wall thicknesses, column positions and ceiling height are ASSUMED / PHOTO-EST.
Door swings indicative; fire-exit doors to open in the direction of escape (to be confirmed).
Furniture shown to scale from the 3D model; work seats: 54 incl. growth and guest seats.

- Existing wall (survey)
- Existing 48 in wall (+ glass or solid infill above, dashed = glass)
- New partition (proposed)
- Glass partition, slim black aluminium frame
- Steel column (position estimated from photos)


FLOOR PLAN

Furnished ground-floor layout

Overall 92'-4" front x 96'-6" (west) / 151'-3" (east) outside dimensions, from the client's hand-measured sketches. Fit-out zones total about 11,092 sft net.

KEY DIMENSION	VALUE	STATUS
Rooms 1 / 3 / 4 widths	25'-0" / 21'-8" / 43'-2"	measured
Middle block depth	73'-5"	derived
Rooms 5 + 6 width	41'-7"	measured
Room 8 length / width	128'-2" / 37'-6"	measured / assumed
Floor to deck	9'-6"	photo estimate

Drawing set (A3): ID-01 furnished plan, ID-02 zoning, ID-03 ceiling + lighting, ID-04 power, data + fire. Geometry check: 75 of 75 model measurements match the survey values.

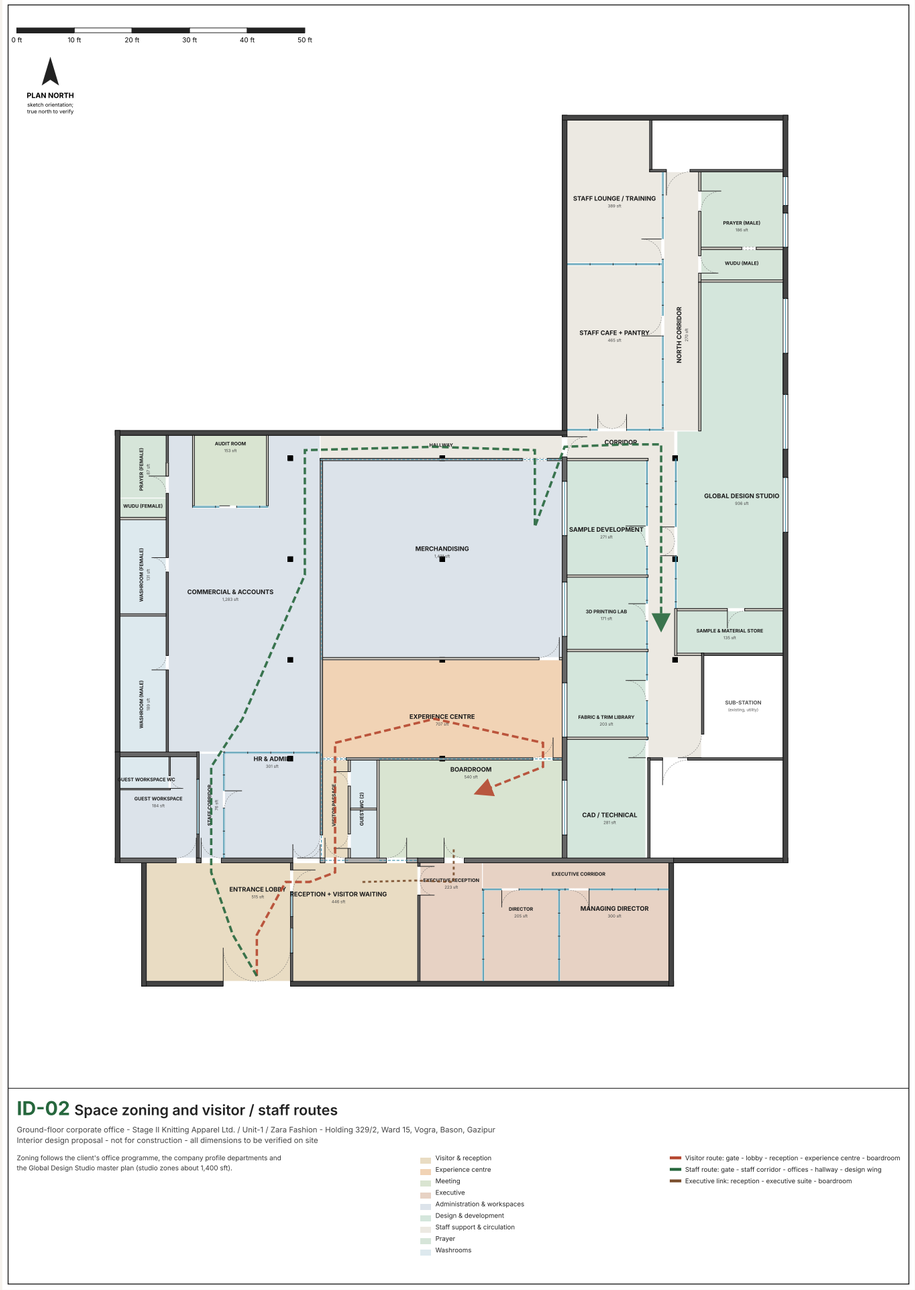

ID-02 Space zoning and visitor / staff routes

Ground-floor corporate office - Stage II Knitting Apparel Ltd. / Unit-1 / Zara Fashion - Holding 329/2, Ward 15, Vogra, Bason, Gazipur
Interior design proposal - not for construction - all dimensions to be verified on site

Zoning follows the client's office programme, the company profile departments and the Global Design Studio master plan (studio zones about 1,400 sft).

- Visitor & reception
- Experience centre
- Meeting
- Executive
- Administration & workspaces
- Design & development
- Staff support & circulation
- Prayer
- Washrooms

- Visitor route: gate - lobby - reception - experience centre - boardroom
- Staff route: gate - staff corridor - offices - hallway - design wing
- Executive link: reception - executive suite - boardroom

SPACE ZONING

Visitors in front, work in the middle, creation and care at the back


Red route: visitors. Green route: staff. Brown: executive link to the boardroom. Visitors never pass through the offices.

ZONE	NET AREA
Visitor & reception	1,036 sft
Experience centre	707 sft
Meeting	693 sft
Executive	873 sft
Administration & workspaces	3,265 sft
Design & development	1,997 sft
Staff support & circulation	1,704 sft
Prayer	375 sft
Washrooms	444 sft

OVERALL 3D VIEW

The complete ground floor, furnished

Editable Blender model: every wall, partition, door, light and piece of furniture is a separate named object in named collections.

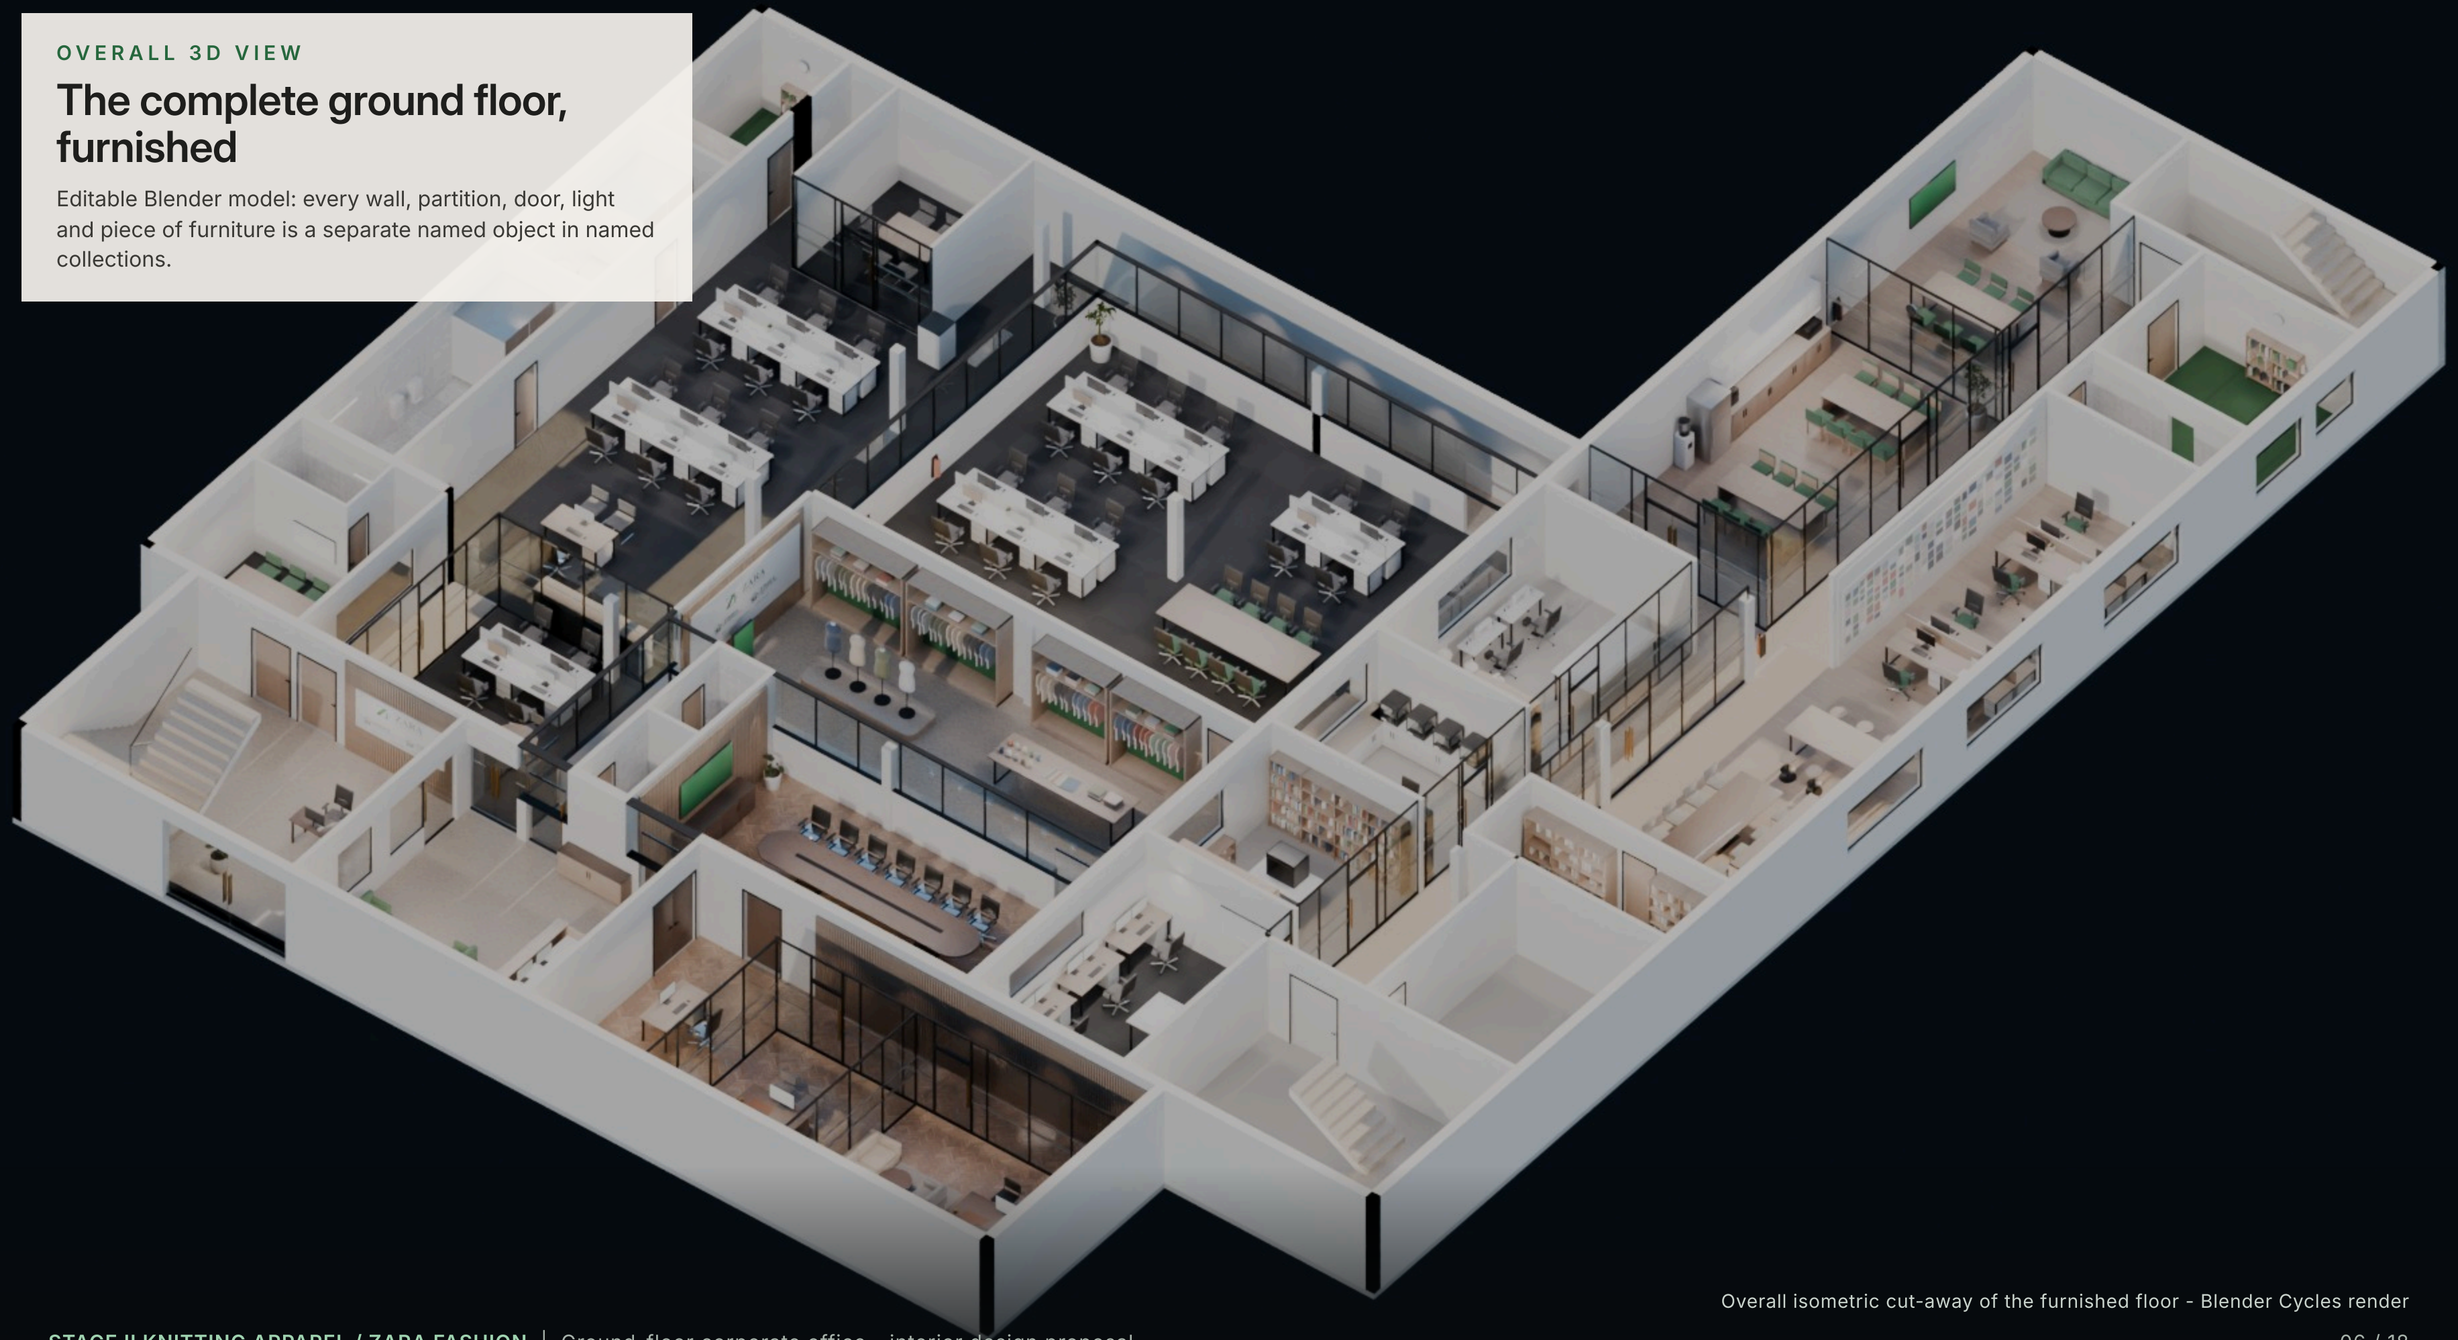

Overall isometric cut-away of the furnished floor - Blender Cycles render

RECEPTION & ENTRANCE


A calm, branded welcome

Guests step down from the gate into a terrazzo lobby with a security desk and the group's three logos on an oak brand wall, then into a warm reception.


- Fluted white-oak counter, terrazzo ledge, accessible 760 mm section
- Backlit logo plate on a fluted oak wall
- Waiting lounge under an oak slat raft and a brass halo
- Glass between lobby and reception



Reception and visitor lounge

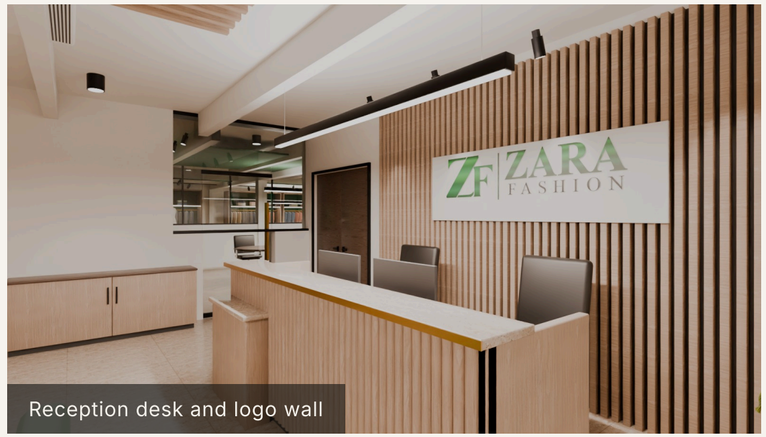

Reception desk and logo wall

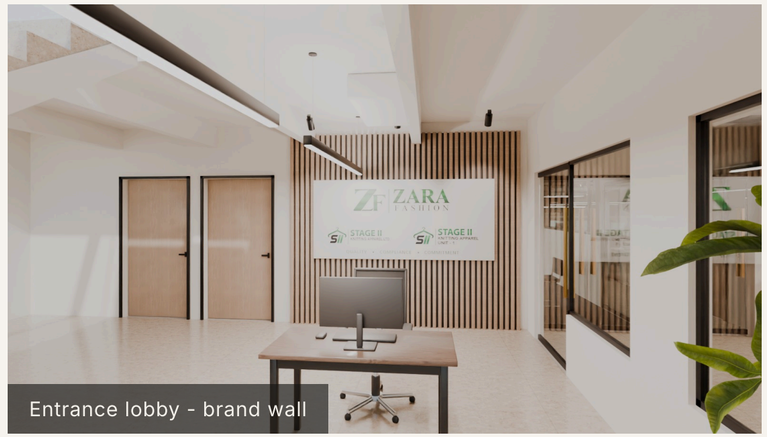


Entrance lobby - brand wall

KEY FINISHES


TZ-01
Terrazzo floor


WO-01
White-oak slats


SS-01
Quartz / terrazzo top


MT-02
Brushed brass

EXPERIENCE CENTRE

Where buyers meet the product

At the centre of the floor, between reception and boardroom, the experience centre tells the company story and shows the collection.

- Brand-story wall with the client's logos and tagline
- Four garment bays: deep green backs, brass rails, LED shelves
- Mannequin plinth and 'yarn to garment' touch table
- Track lights fixed to the existing beams
- Glass views into boardroom and fabric library

KEY FINISHES



TZ-01
Terrazzo floor



PA-02
Brand green




WO-01
White-oak slats



MT-02
Brushed brass



Experience centre

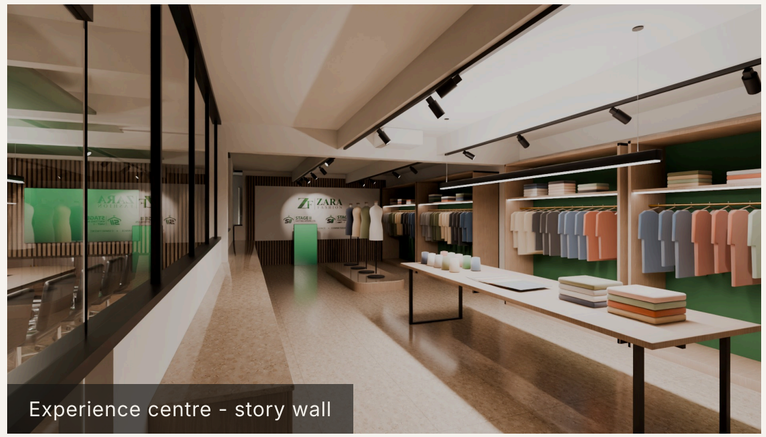

Experience centre - story wall



Display detail

EXECUTIVE OFFICE


Managing Director's office


A quiet, warm executive suite next to the reception, reached through the PA and executive waiting area and a glass executive corridor.

- 2.1 m smoked-walnut desk, cognac leather chair
- Walnut feature wall with the company logo
- Lounge corner for informal meetings
- Oak herringbone floor, oak slat raft and halo light
- Direct link from the executive suite to the boardroom




MD office

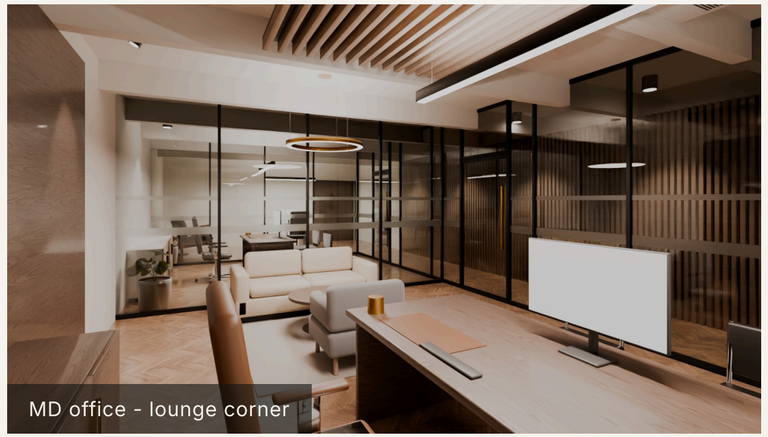
MD office - lounge corner

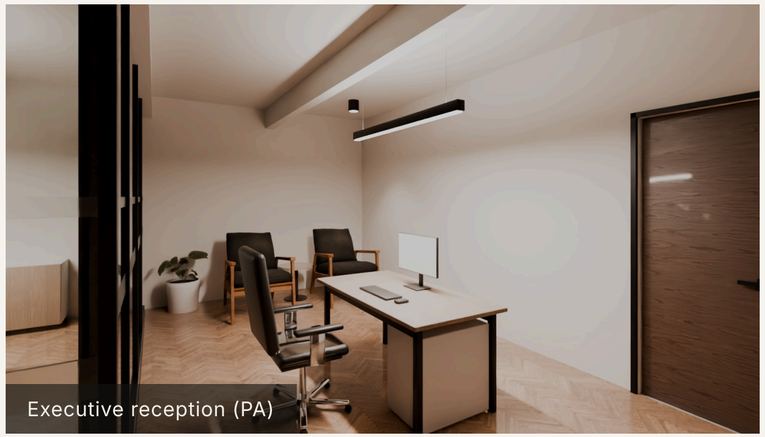
Executive reception (PA)

KEY FINISHES


WD-01
Oak herringbone


WO-02
Smoked walnut


UP-02
Cognac leather

UP-01
Sand fabric


BOARDROOM

A boardroom for international buyers

Fifteen seats around a 6.1 m walnut table, between the reception, the executive suite and the experience centre.

- 86 in screen on an oak slat media wall
- Green felt acoustic rafts set between the existing beams
- Walnut acoustic slat wall, herringbone oak floor
- Power/data trough in the table; privacy curtains recommended on the glass


KEY FINISHES



WD-01
Oak herringbone



WO-02
Smoked walnut




AC-01
Acoustic felt



WO-01
White-oak slats



Boardroom

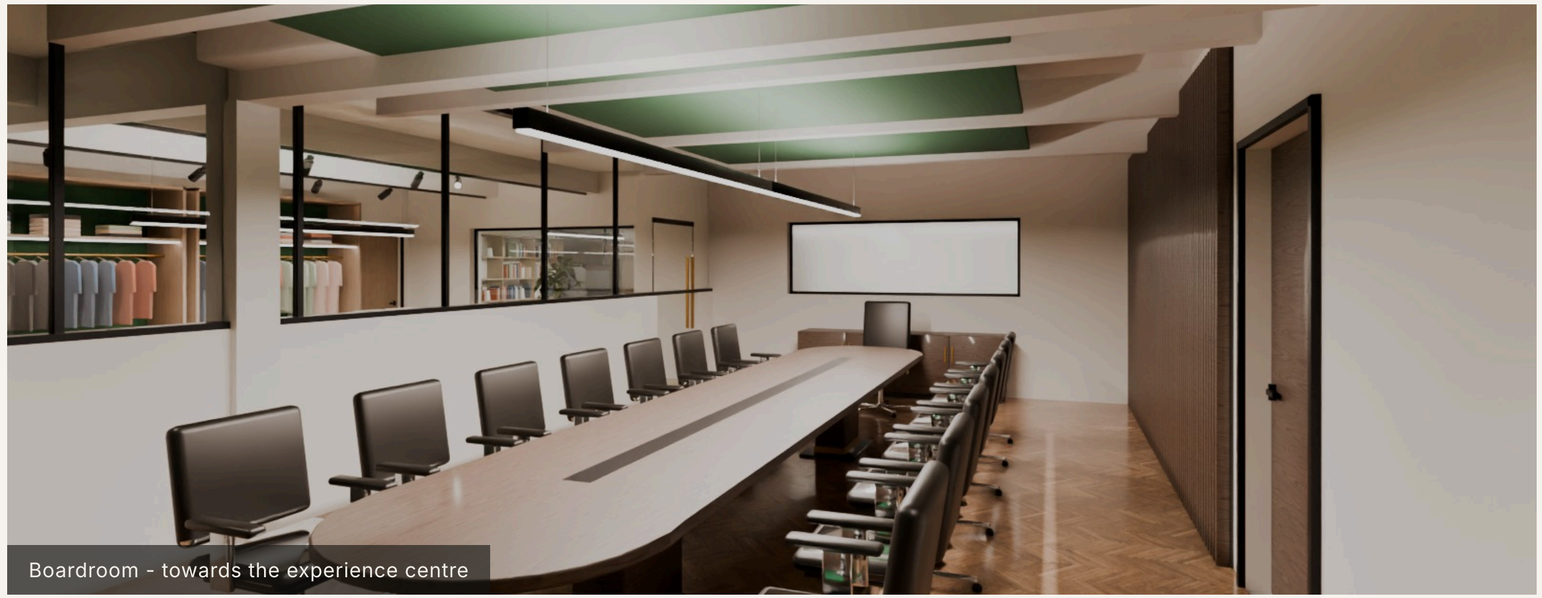

Boardroom - towards the experience centre

MAIN OFFICE


Workplaces that work


Merchandising, commercial & accounts and HR & admin share one desk family and one light and acoustic language.


- 48 dedicated workstations + 6 guest seats (about 50 % growth)
- 1400 × 700 mm bench desks, green felt screens, task chairs
- Team table and sample-review counter for merchandisers
- Felt baffles between the beams, 4000 K linear light

KEY FINISHES

CP-01	AC-01	UP-01	PA-01
Carpet tile	Acoustic felt	Green fabric	Warm white paint

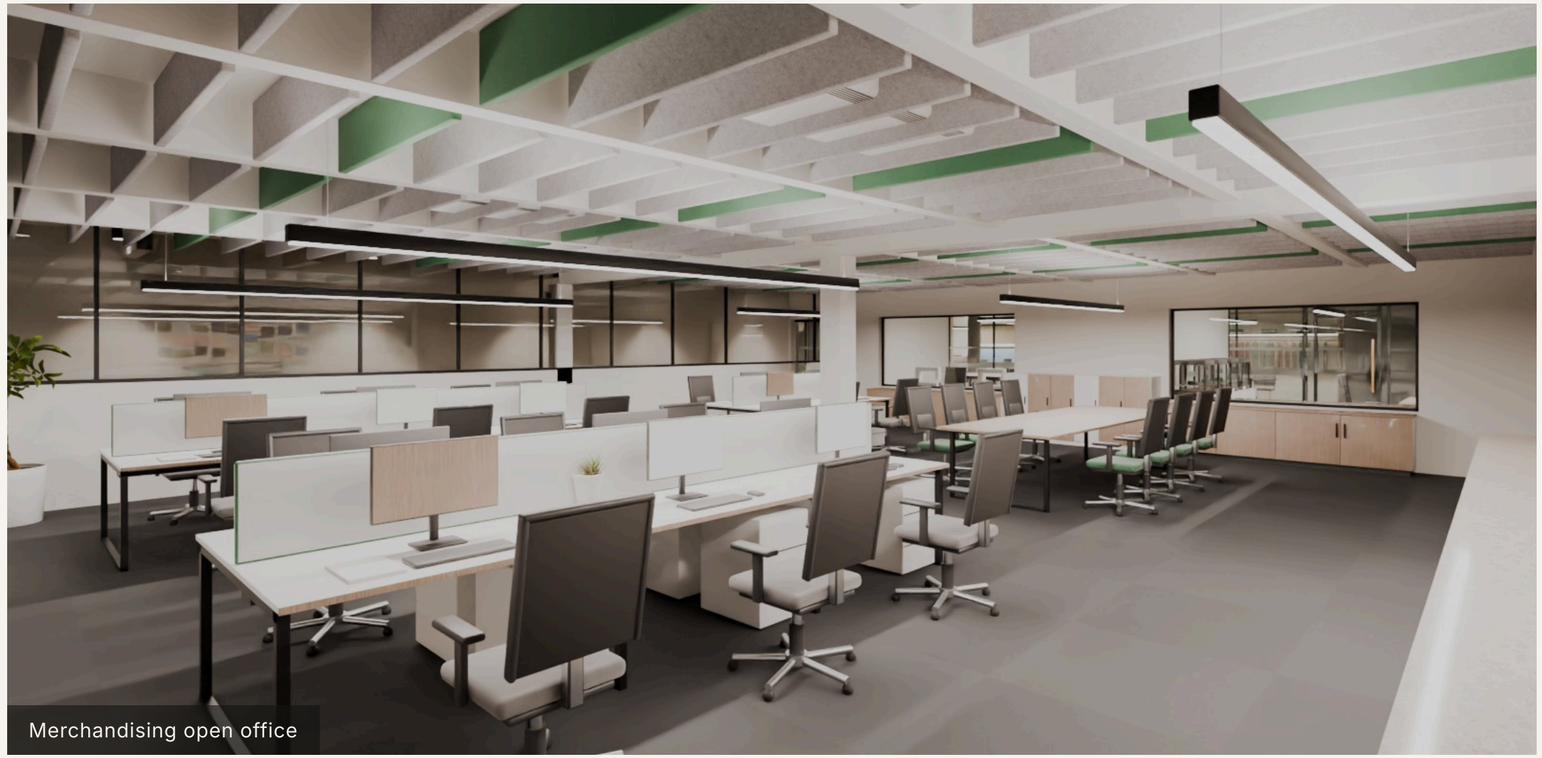
Merchandising open office

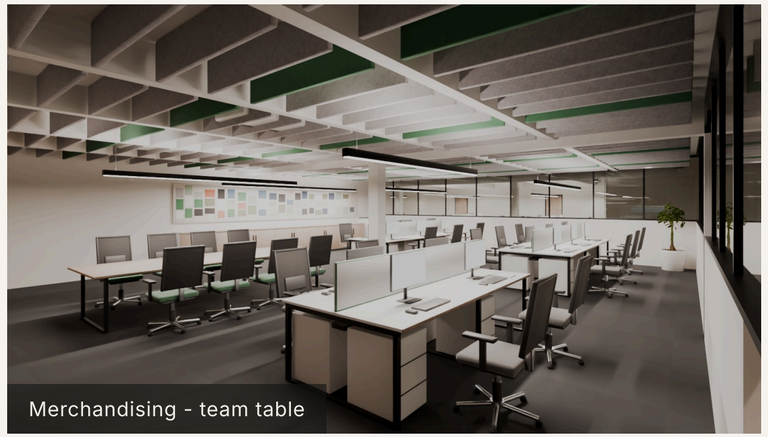
Merchandising - team table

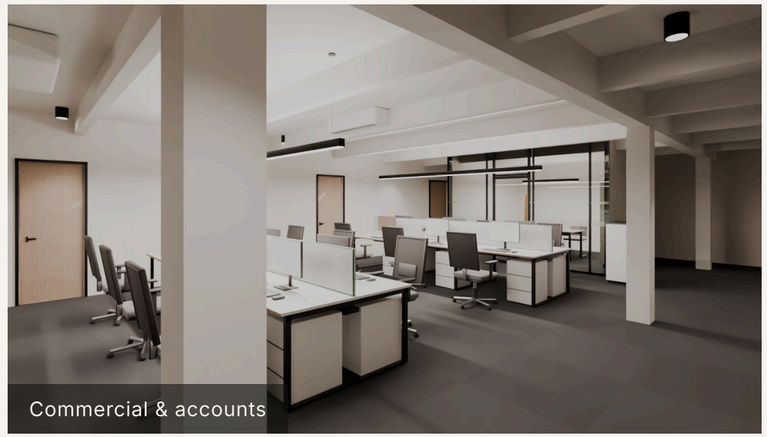
Commercial & accounts

DESIGN STUDIO & CAD

The Global Design Studio

Zones from the master plan (about 1,400 sft): creative desks, trend wall, collection presentation, technical design, fabric library and storage.

- Designer desks at the east windows
- 7.4 m mood-board wall for trend research
- Buyer presentation table with 86 in screen
- CAD room with plotter; fabric & trim library with D65 booth
- 3D printing lab and sample room as office-grade support

KEY FINISHES



WD-02
Oak-look plank



UP-01
Green fabric




WO-02
Smoked walnut

PA-01
Warm white paint



Global Design Studio

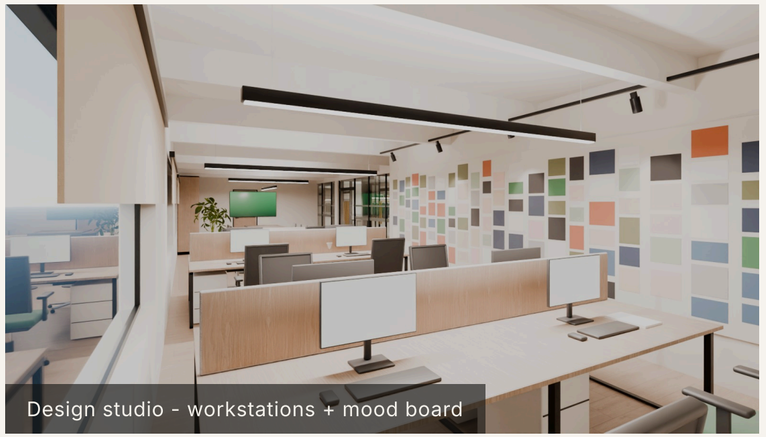

Design studio - workstations + mood board




CAD / technical design

SUPPORT SPACES

Care for the people who make the product


Staff cafe + pantry


Lounge / training (multipurpose)

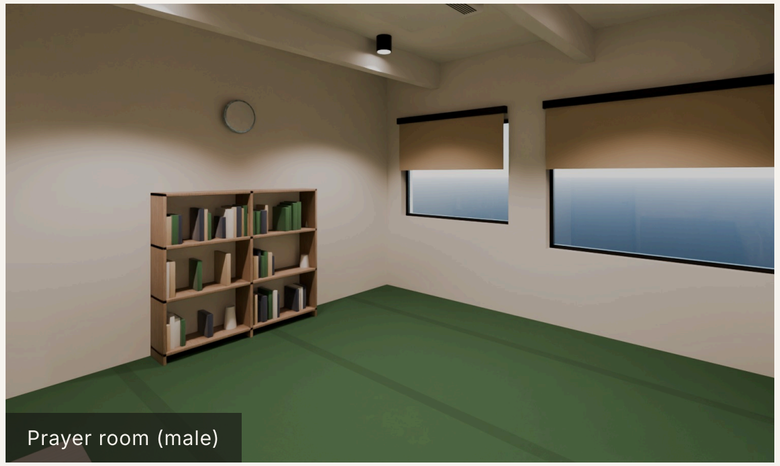
Prayer room (male)


Sample development


Fabric & trim library



Staff washroom

MATERIALS & FINISHES


A warm, durable palette

CODE	FINISH	WHERE
TZ-01	Terrazzo-look porcelain, warm beige	visitor floors
WD-01	Oak herringbone	boardroom, executive
CP-01	Charcoal carpet tile	offices
WO-01	White-oak slats on acoustic felt	feature walls
WO-02	Smoked walnut veneer	executive furniture
PA-02	Deep green from the logo	accents
GL-01	12 mm glass, black aluminium	partitions
MT-02	Brushed brass	details

Specification concepts; final products by sample approval. Full schedule in 04_DOCUMENTATION.

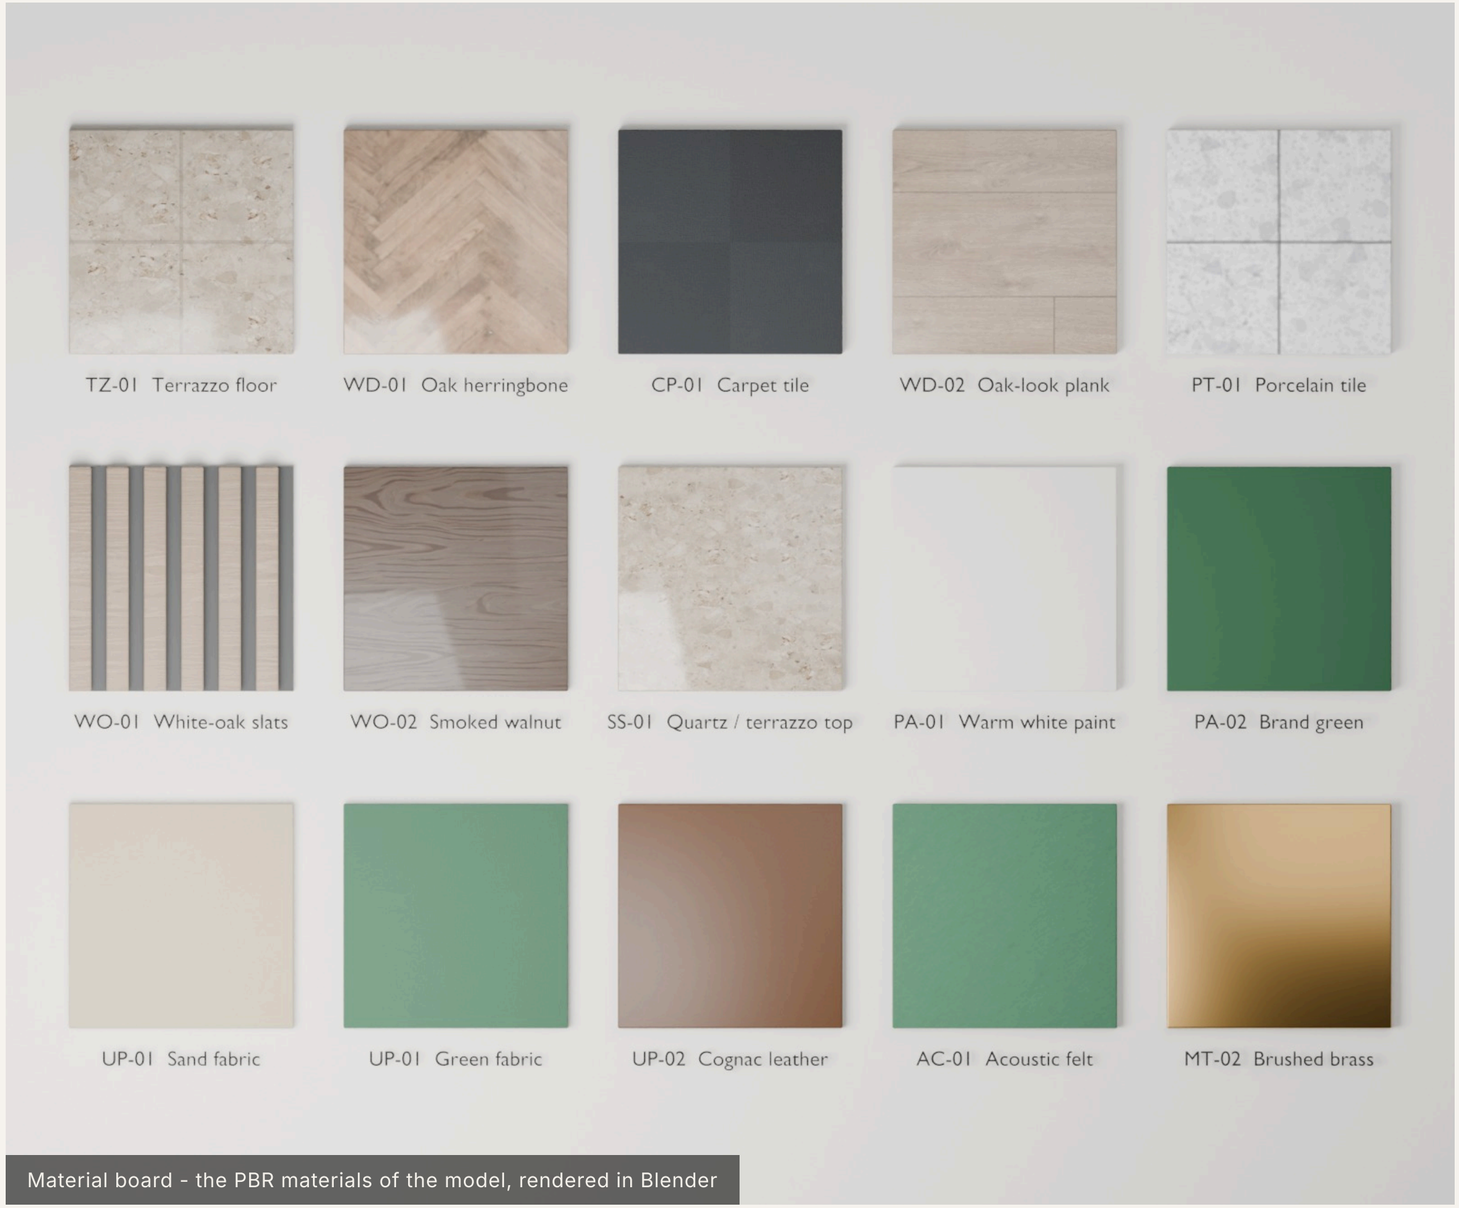

Material board - the PBR materials of the model, rendered in Blender

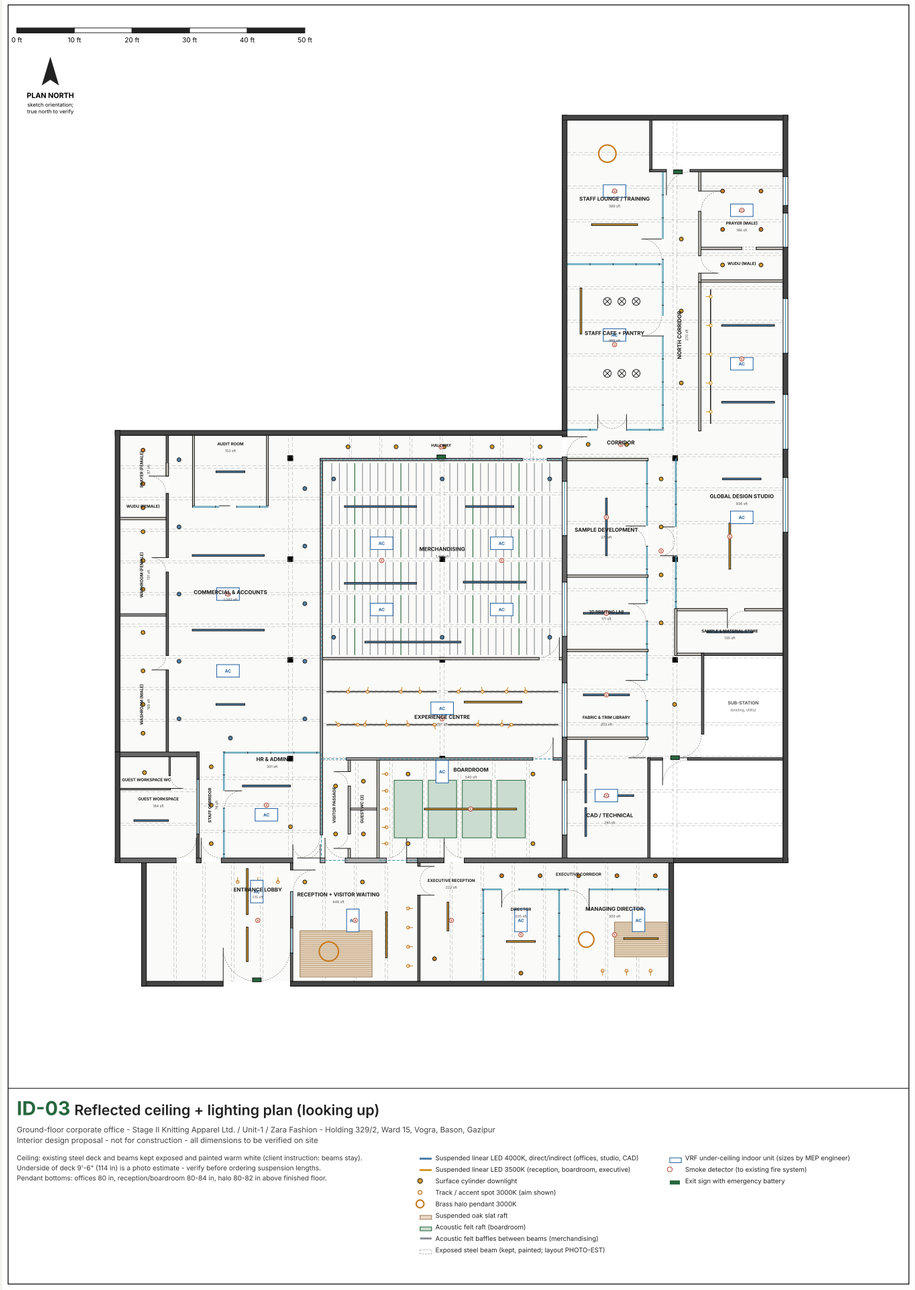

ID-03 Reflected ceiling + lighting plan (looking up)

Ground-floor corporate office - Stage II Knitting Apparel Ltd. / Unit-1 / Zara Fashion - Holding 329/2, Ward 15, Vogra, Bason, Gazipur
Interior design proposal - not for construction - all dimensions to be verified on site

Ceiling: existing steel deck and beams kept exposed and painted warm white (client instruction: beams stay).
Underside of deck 9'-6" (114 in) is a photo estimate - verify before ordering suspension lengths.
Pendant bottoms: offices 80 in, reception/boardroom 80-84 in, halo 80-82 in above finished floor.

- Suspended linear LED 4000K, direct/indirect (offices, studio, CAD)
- Suspended linear LED 3500K (reception, boardroom, executive)
- Surface cylinder downlight
- Track / accent spot 3000K (aim shown)
- Brass halo pendant 3000K
- Suspended oak slat raft
- Acoustic felt raft (boardroom)
- Acoustic felt baffles between beams (merchandising)
- Exposed steel beam (kept, painted; layout PHOTO-EST)
- VRF under-ceiling indoor unit (sizes by MEP engineer)
- Smoke detector (to existing fire system)
- Exit sign with emergency battery

LIGHTING & CEILING

The beams stay - and do the work

- Existing steel deck and beams kept exposed, painted warm white
- Experience centre: track lights fixed to the beams
- Boardroom: green felt rafts between the beams; merchandising: felt baffles
- Reception and MD office: oak slat rafts below beam level
- 4000 K direct/indirect light over desks; 3000-3500 K in visitor and executive areas
- Accent spots on products and brand walls; halo pendants



Felt rafts between the beams - boardroom

DESIGN BENEFITS

What the company gains

Operational efficiency

Departments placed by workflow: merchandising beside the experience centre and sample room, HR at the staff entrance, the studio next to CAD, library and samples.

Professional image

A visitor sequence that presents the brand, the product and the management in one walk.

Employee comfort


Ergonomic desks, acoustic control, daylight in the studio, cafe, lounge and prayer rooms.

Flexibility

Bench desks, a multipurpose lounge / training room, glass partitions and about 50 % seat growth.

Maintainability

Hard-wearing terrazzo and porcelain, replaceable carpet tiles, exposed services that stay accessible.

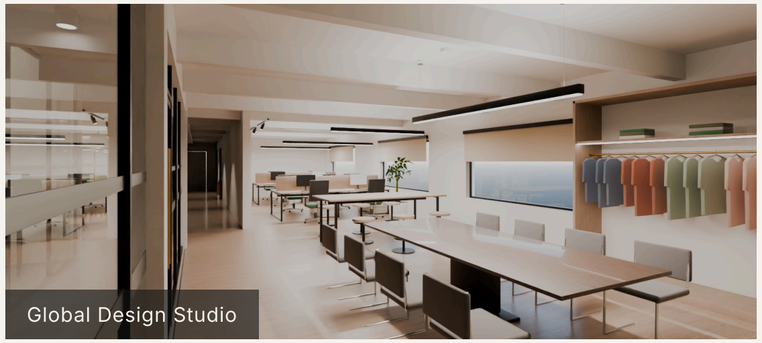

Global Design Studio

IMPLEMENTATION CONSIDERATIONS

To confirm before construction

ITEM	WHAT HAS TO BE CONFIRMED
Site measurements	Floor-to-deck height, room 8 width, column positions and beam layout (currently estimated).
Structure	Lintels for the new openings D17, D20, D22 and the lobby-reception glass - structural engineer.
Fire & escape	Ground-floor exits of the NE / SE stairs; without them the walk to the main gate is about 220 ft from the lounge.
MEP	VRF cooling, fresh air for windowless rooms, exhausts (WCs, pantry, 3D lab), power/data, UPS, DB location.
Accessibility	Ramp or lift at the two entrance steps; one accessible WC (door at least 36 in).
Approvals & branding	Fire / building approvals as applicable; trademark check for 'Global Design Studio'; signage from original vector logos.

No budget or programme was supplied, so none is stated. Details: 04_DOCUMENTATION/technical_coordination_notes.md.

RECOMMENDED NEXT STEPS

01
Site measurement
Floor-to-deck height, room 8 width, columns and beams; then update the survey data, rebuild and re-verify the model.

02
Engineering reviews
Structural check of the new openings, fire strategy and exits, HVAC, power and data design.

03
Client decisions
Head count per department, interior budget, experience-centre content and approval of this layout.

04
Detailed design
Construction drawings, finish samples, furniture selection and bill of quantities after approval.

CLOSING

Quality, compliance and commitment - built into the space.

A ground floor that welcomes buyers, supports management and gives the design team room to create - ready for detailed design once the open site measurements are confirmed.

Experience centre towards the brand-story wall - Blender Cycles render