
INTERIOR DESIGN PROPOSAL | GROUND FLOOR

# Premium International Fashion Corporate Headquarters & Design Development Centre

Stage II Knitting Apparel Ltd. · Stage II Knitting Apparel Unit-1 · Zara Fashion

Holding 329/2, Ward 15, Vogra, Bason, Gazipur

QUALITY • COMPLIANCE • COMMITMENT

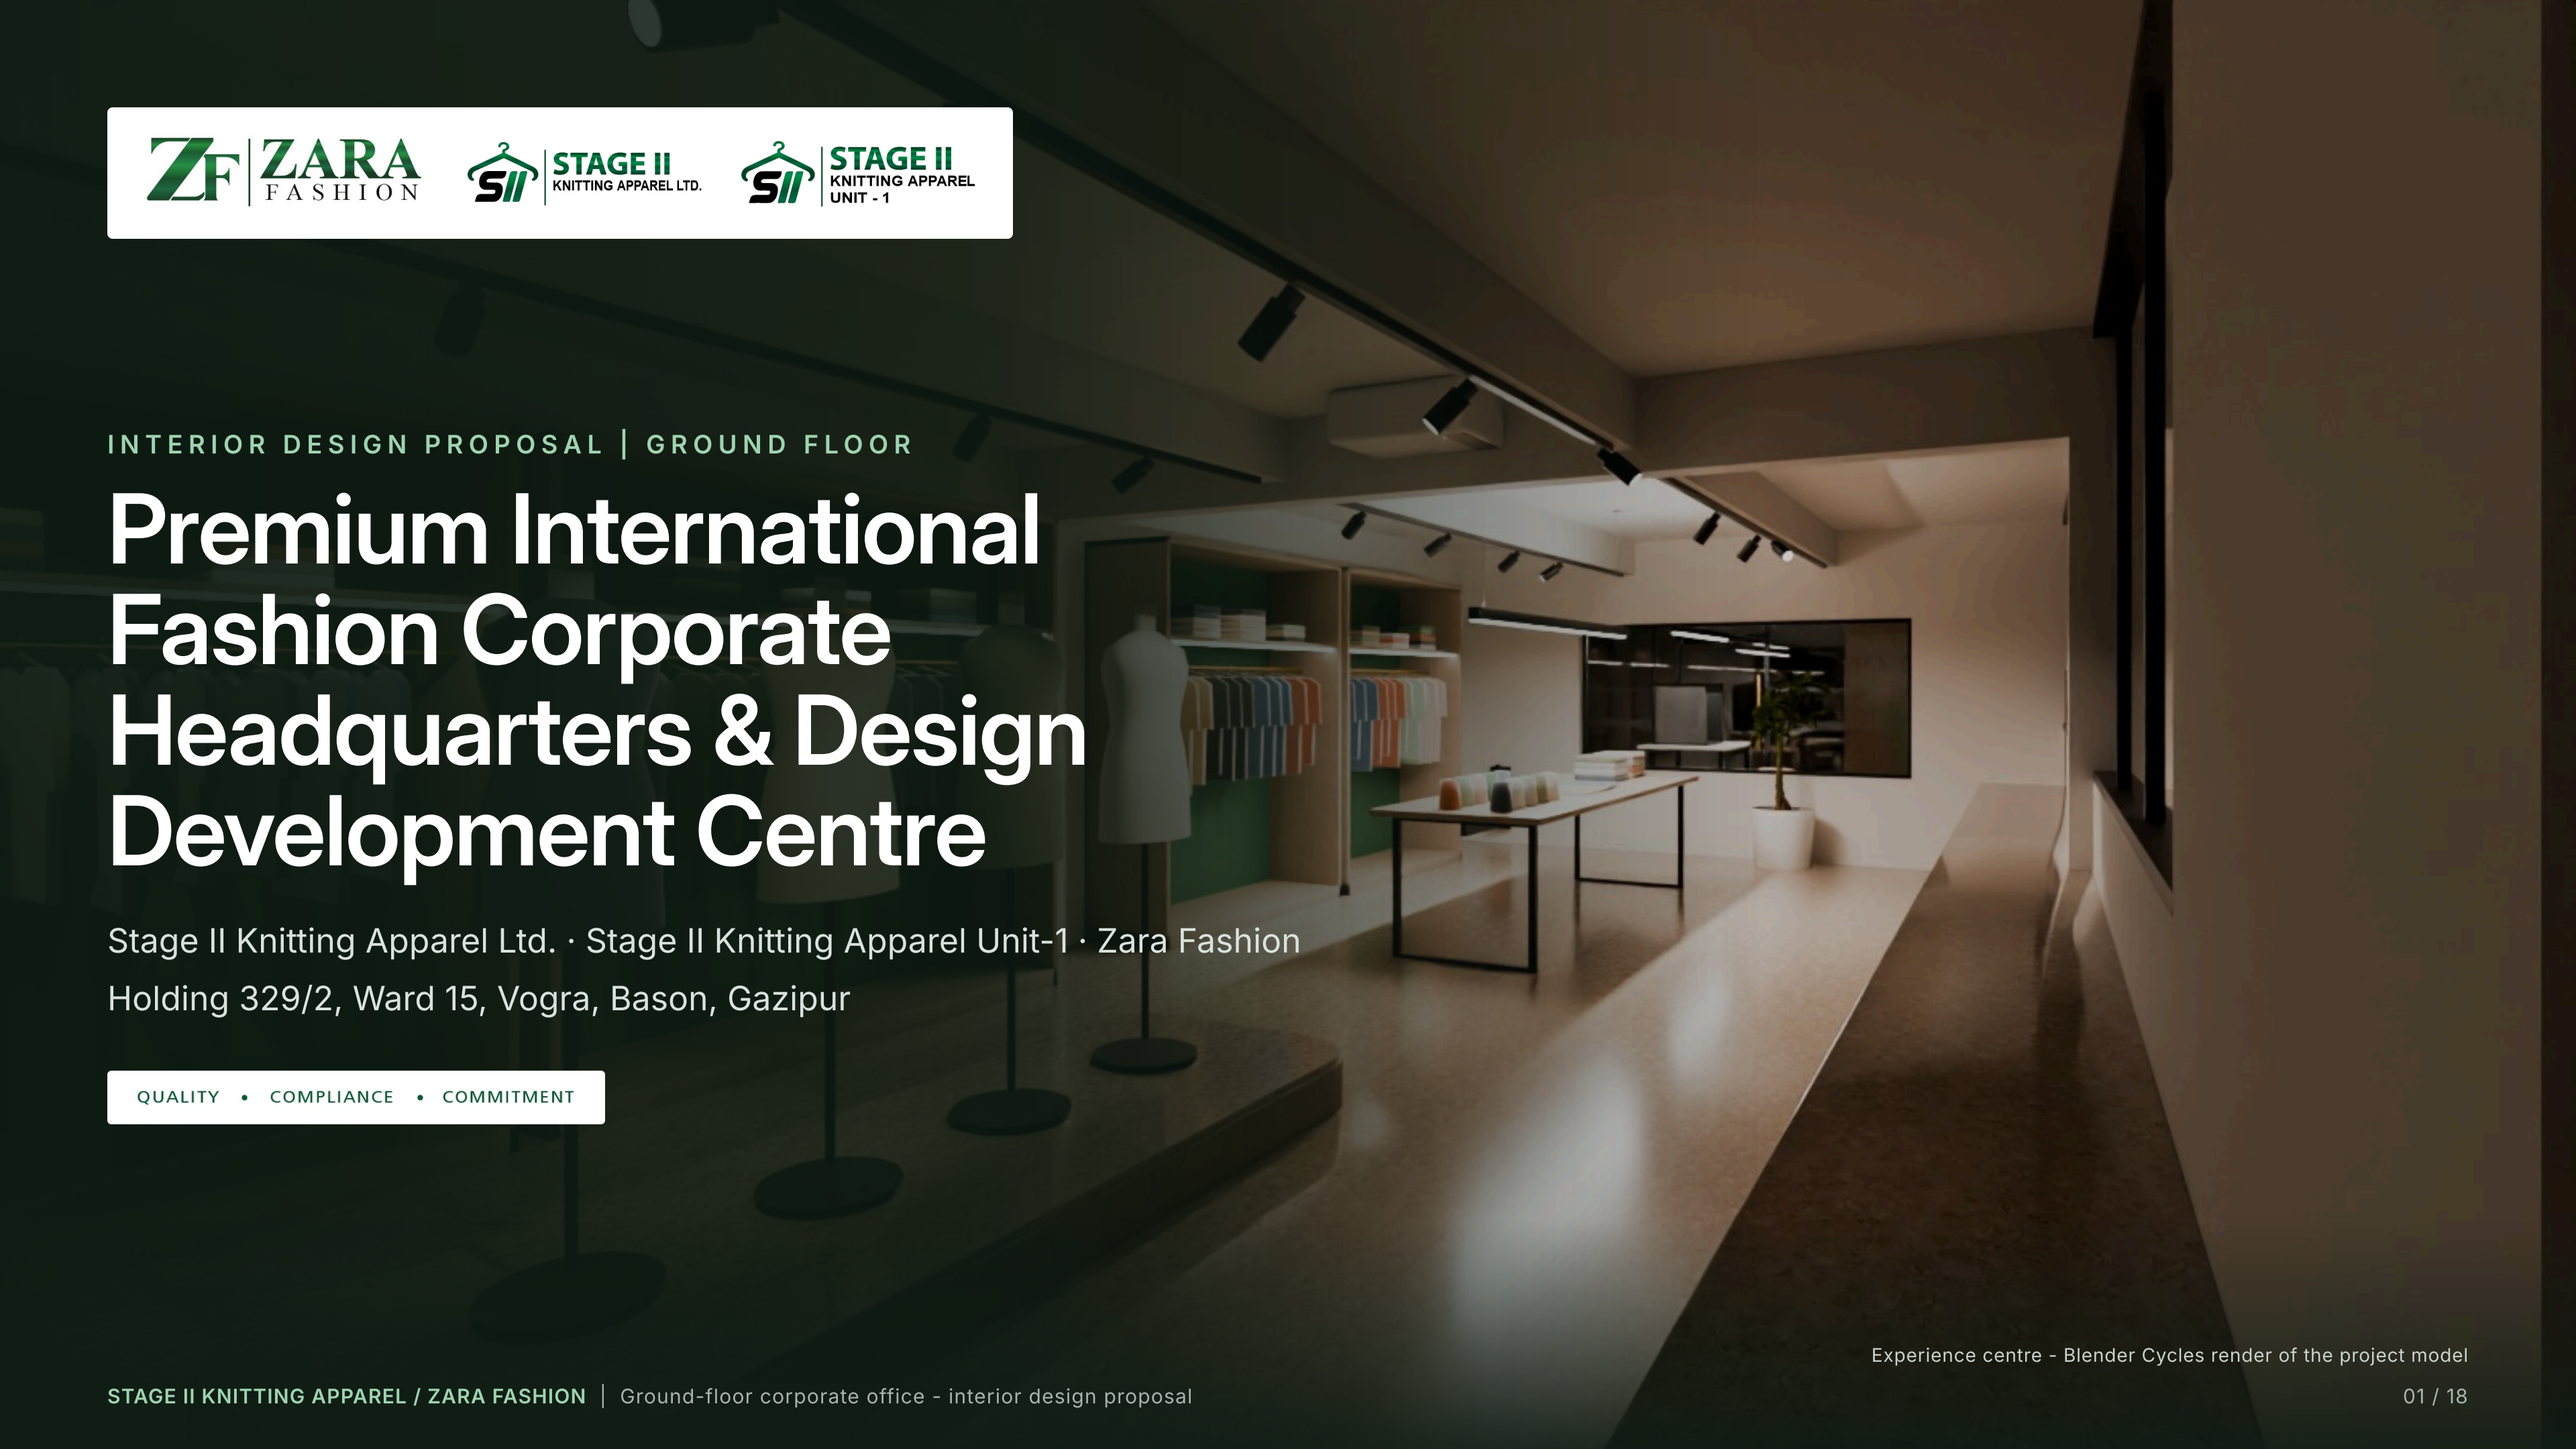

Experience centre - Blender Cycles render of the project model

PROJECT VISION

# One floor that tells the story from yarn to buyer-ready collection

The face of the company: a calm, premium headquarters where buyers meet the brand, management works in comfort and the design team turns trends into products - with no production on this floor.

- Visitor journey: lobby - reception - experience centre - boardroom
- Executive suite and administration beside the visitor zone
- Design wing, staff cafe, lounge / training and prayer rooms behind

**34**
rooms and zones designed

**54**
work seats incl. growth and guests

**707 sft**
experience centre at the heart

**75 / 75**
survey dimension checks passed



Reception desk and logo wall

DESIGN PHILOSOPHY

# Six principles behind every decision

## 01
### Modernity
Clean planes, slim black-aluminium glass, an exposed and painted structure - an honest contemporary shell.

## 02
### Functionality
Clear zoning: visitors, executives, administration, design development and staff support each have their place.

## 03
### Collaboration
Team tables, a buyer presentation table, a sample-review counter and glass views between departments.

## 04
### Creativity
Mood-board wall, fabric & trim library, 3D printing lab and display bays keep products and ideas visible.

## 05
### Employee comfort
Ergonomic 1400 mm desks, acoustic felt, 4000 K task light, staff cafe, lounge and prayer rooms.

## 06
### Professional image
The client's own logos and green, terrazzo, oak and walnut: a confident international brand presence.




**ID-01** Furnished floor plan with dimensions

Ground-floor corporate office - Stage II Knitting Apparel Ltd. / Unit-1 / Zara Fashion - Holding 329/2, Ward 15, Vogra, Bason, Gazipur
Interior design proposal - not for construction - all dimensions to be verified on site

All dimensions in feet-inches from the client's hand-measured sketches (see dimension_schedule.csv).
Room 8 width, stair layouts, wall thicknesses, column positions and ceiling height are ASSUMED / PHOTO-EST.
Door swings indicative; fire-exit doors to open in the direction of escape (to be confirmed).
Furniture shown to scale from the 3D model; work seats: 54 incl. growth and guest seats.

- Existing wall (survey)
- Existing 48 in wall (+ glass or solid infill above, dashed = glass)
- New partition (proposed)
- Glass partition, slim black aluminium frame
- Steel column (position estimated from photos)


FLOOR PLAN

# Furnished ground-floor layout

Overall 92'-4" front x 96'-6" (west) / 151'-3" (east) outside dimensions, from the client's hand-measured sketches. Fit-out zones total about 11,092 sft net.

| KEY DIMENSION | VALUE | STATUS |
|---|---|---|
| **Rooms 1 / 3 / 4 widths** | 25'-0" / 21'-8" / 43'-2" | measured |
| **Middle block depth** | 73'-5" | derived |
| **Rooms 5 + 6 width** | 41'-7" | measured |
| **Room 8 length / width** | 128'-2" / 37'-6" | measured / assumed |
| **Floor to deck** | 9'-6" | photo estimate |

Drawing set (A3): ID-01 furnished plan, ID-02 zoning, ID-03 ceiling + lighting, ID-04 power, data + fire. Geometry check: 75 of 75 model measurements match the survey values.

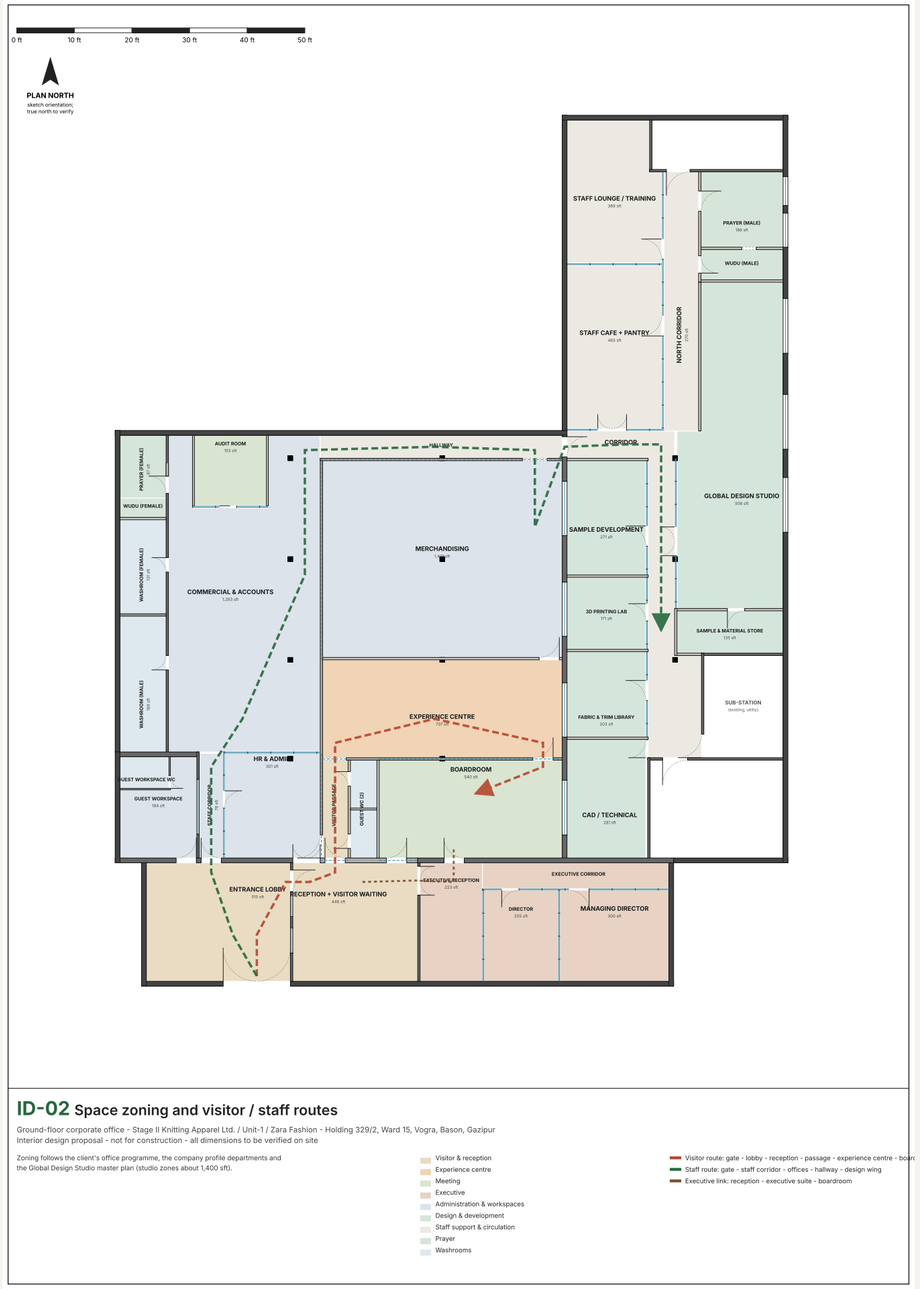


**ID-02** Space zoning and visitor / staff routes

Ground-floor corporate office - Stage II Knitting Apparel Ltd. / Unit-1 / Zara Fashion - Holding 329/2, Ward 15, Vogra, Bason, Gazipur
Interior design proposal - not for construction - all dimensions to be verified on site

Zoning follows the client's office programme, the company profile departments and the Global Design Studio master plan (studio zones about 1,400 sft).

- Visitor & reception
- Experience centre
- Meeting
- Executive
- Administration & workspaces
- Design & development
- Staff support & circulation
- Prayer
- Washrooms

- Visitor route: gate - lobby - reception - passage - experience centre - board
- Staff route: gate - staff corridor - offices - hallway - design wing
- Executive link: reception - executive suite - boardroom

SPACE ZONING

# Visitors in front, work in the middle, creation and care at the back


Red route: visitors. Green route: staff. Brown: executive link to the boardroom. Visitors never pass through the offices.

| ZONE | NET AREA |
|---|---|
| **Visitor & reception** | 1,036 sft |
| **Experience centre** | 707 sft |
| **Meeting** | 693 sft |
| **Executive** | 873 sft |
| **Administration & workspaces** | 3,265 sft |
| **Design & development** | 1,997 sft |
| **Staff support & circulation** | 1,704 sft |
| **Prayer** | 375 sft |
| **Washrooms** | 444 sft |

OVERALL 3D VIEW

# The complete ground floor, furnished

Editable Blender model: every wall, partition, door, light and piece of furniture is a separate named object in named collections.

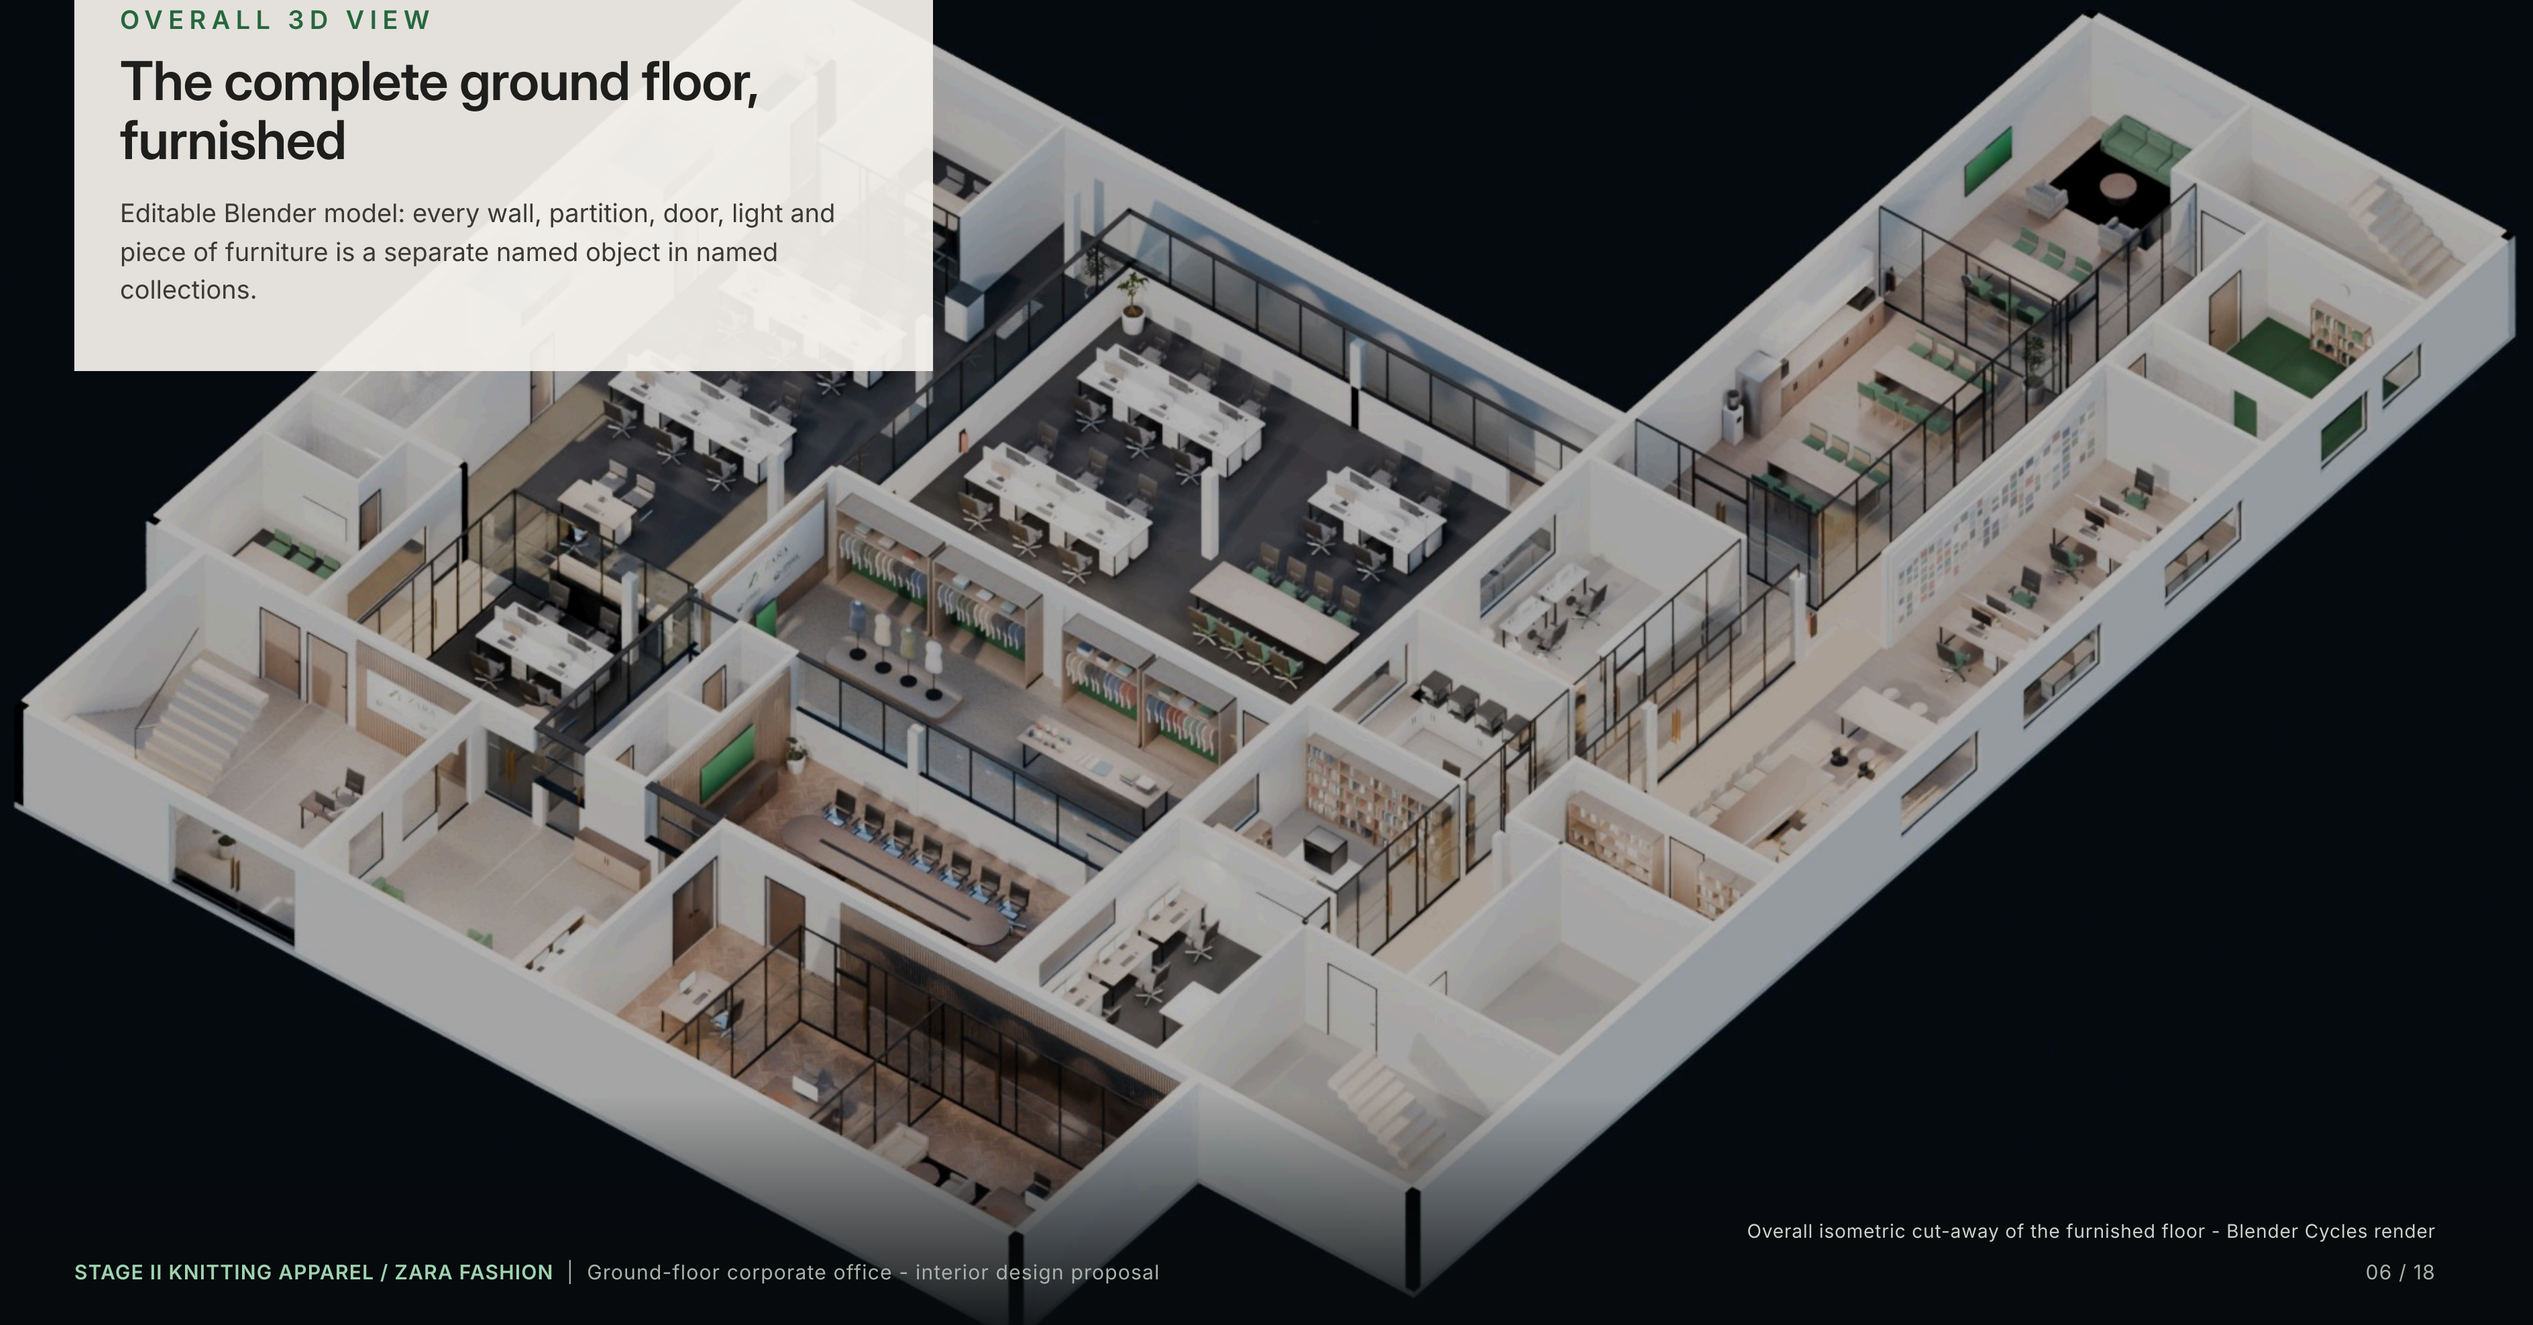

Overall isometric cut-away of the furnished floor - Blender Cycles render

RECEPTION & ENTRANCE


# A calm, branded welcome


Guests step down from the gate into a terrazzo lobby with a security desk and the group's three logos on an oak brand wall, then into a warm reception.

- Fluted white-oak counter, terrazzo ledge, accessible 760 mm section
- Backlit logo plate on a fluted oak wall
- Waiting lounge under an oak slat raft and a brass halo
- Glass between lobby and reception



Reception and visitor lounge

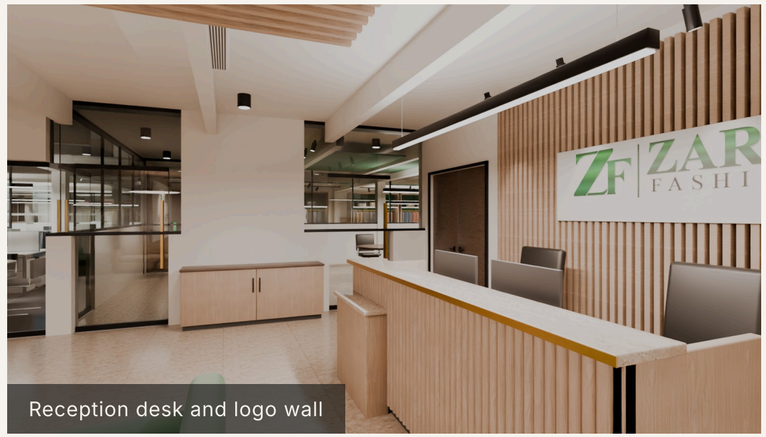
Reception desk and logo wall

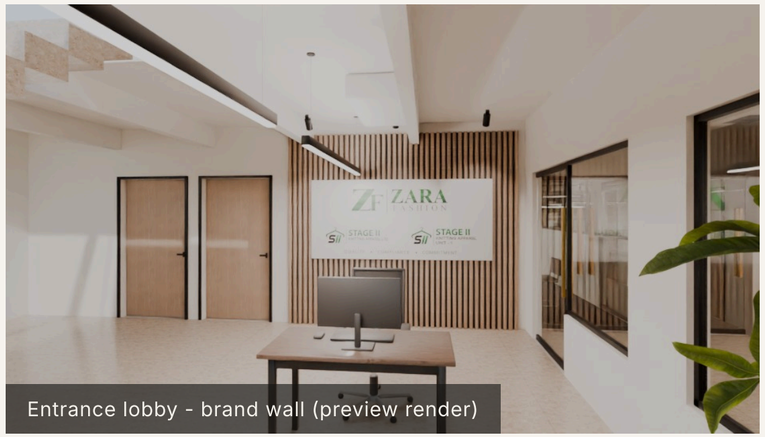


Entrance lobby - brand wall (preview render)

KEY FINISHES


**TZ-01**
Terrazzo floor


**WO-01**
White-oak slats


**SS-01**
Quartz / terrazzo top


**MT-02**
Brushed brass

EXPERIENCE CENTRE

# Where buyers meet the product

At the centre of the floor, between reception and boardroom, the experience centre tells the company story and shows the collection.

- Brand-story wall with the client's logos and tagline
- Four garment bays: deep green backs, brass rails, LED shelves
- Mannequin plinth and 'yarn to garment' touch table
- Track lights fixed to the existing beams
- Glass views into boardroom and fabric library

KEY FINISHES



**TZ-01**
Terrazzo floor



**PA-02**
Brand green




**WO-01**
White-oak slats



**MT-02**
Brushed brass



Experience centre

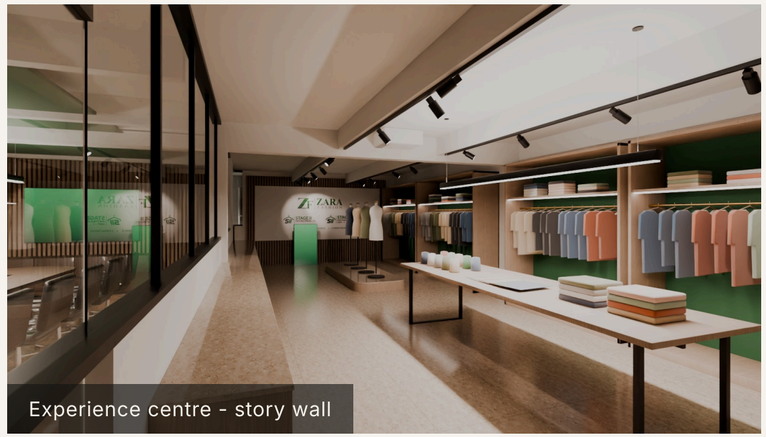

Experience centre - story wall



Display detail (preview render)

EXECUTIVE OFFICE


# Managing Director's office

A quiet, warm executive suite next to the reception, reached through the PA and executive waiting area and a glass executive corridor.

- 2.1 m smoked-walnut desk, cognac leather chair
- Walnut feature wall with the company logo
- Lounge corner for informal meetings
- Oak herringbone floor, oak slat raft and halo light
- Direct link from the executive suite to the boardroom




MD office

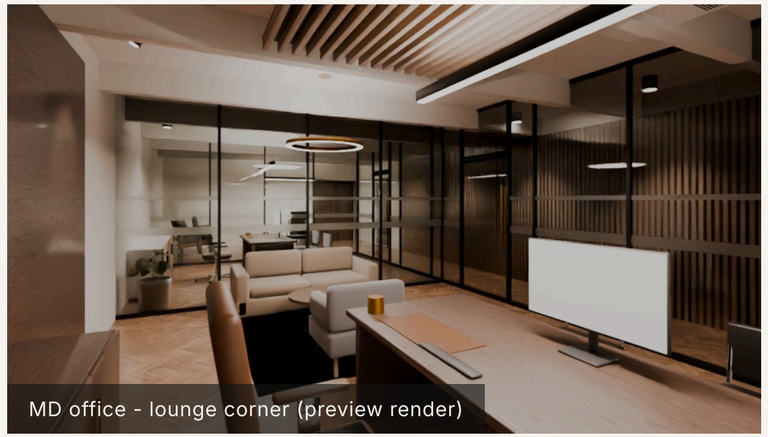
MD office - lounge corner (preview render)


Executive reception (PA) (preview render)

KEY FINISHES


**WD-01**
Oak herringbone


**WO-02**
Smoked walnut


**UP-02**
Cognac leather


**UP-01**
Sand fabric


BOARDROOM

# A boardroom for international buyers

Fifteen seats around a 6.1 m walnut table, between the reception, the executive suite and the experience centre.

- 86 in screen on an oak slat media wall
- Green felt acoustic rafts set between the existing beams
- Walnut acoustic slat wall, herringbone oak floor
- Power/data trough in the table; privacy curtains recommended on the glass


KEY FINISHES



**WD-01**
Oak herringbone



**WO-02**
Smoked walnut




**AC-01**
Acoustic felt



**WO-01**
White-oak slats



Boardroom

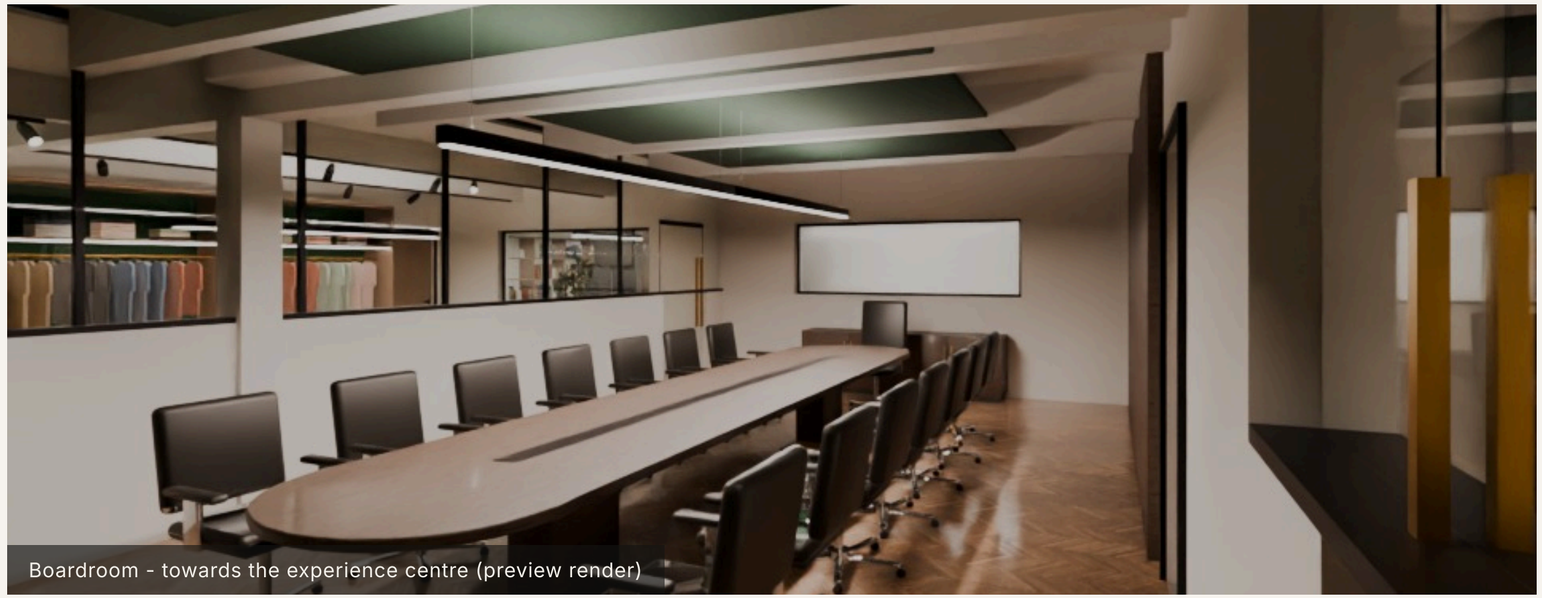


Boardroom - towards the experience centre (preview render)

MAIN OFFICE


# Workplaces that work

Merchandising, commercial & accounts and HR & admin share one desk family and one light and acoustic language.


- 48 dedicated workstations + 6 guest seats (about 50 % growth)
- 1400 × 700 mm bench desks, green felt screens, task chairs
- Team table and sample-review counter for merchandisers
- Felt baffles between the beams, 4000 K linear light

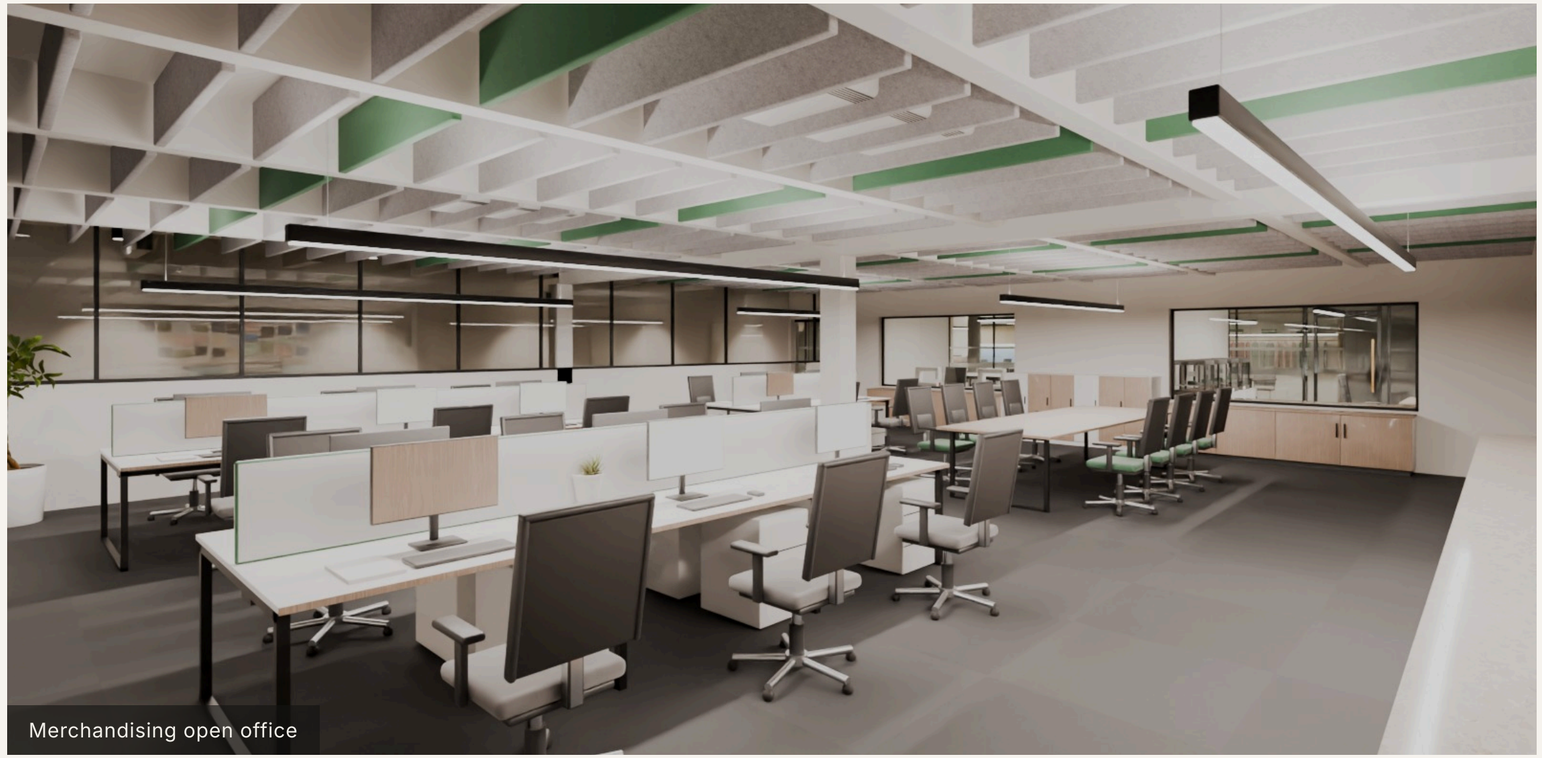

Merchandising open office

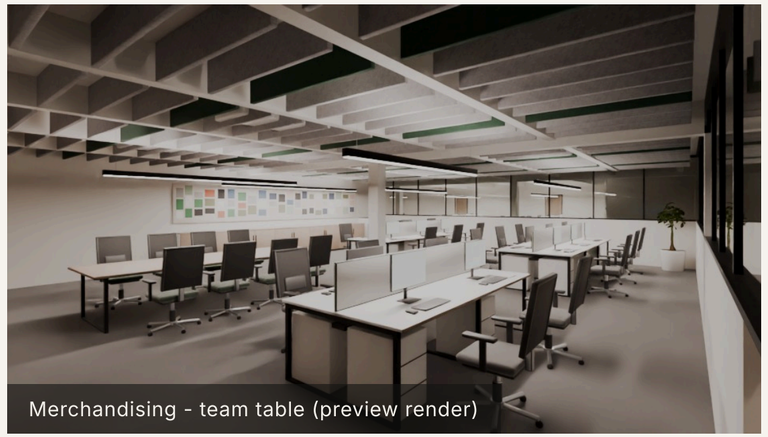

Merchandising - team table (preview render)

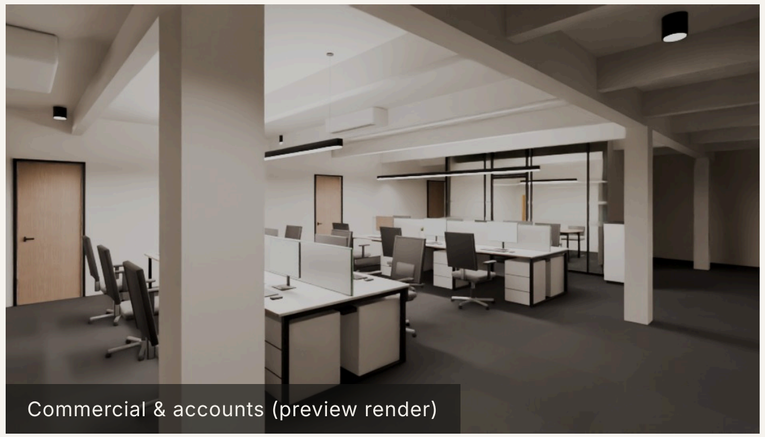

Commercial & accounts (preview render)

KEY FINISHES

| CP-01 | AC-01 | UP-01 | PA-01 |
|---|---|---|---|
| Carpet tile | Acoustic felt | Green fabric | Warm white paint |

DESIGN STUDIO & CAD


# The Global Design Studio

Zones from the master plan (about 1,400 sft): creative desks, trend wall, collection presentation, technical design, fabric library and storage.


- Designer desks at the east windows
- 7.4 m mood-board wall for trend research
- Buyer presentation table with 86 in screen
- CAD room with plotter; fabric & trim library with D65 booth
- 3D printing lab and sample room as office-grade support



Global Design Studio

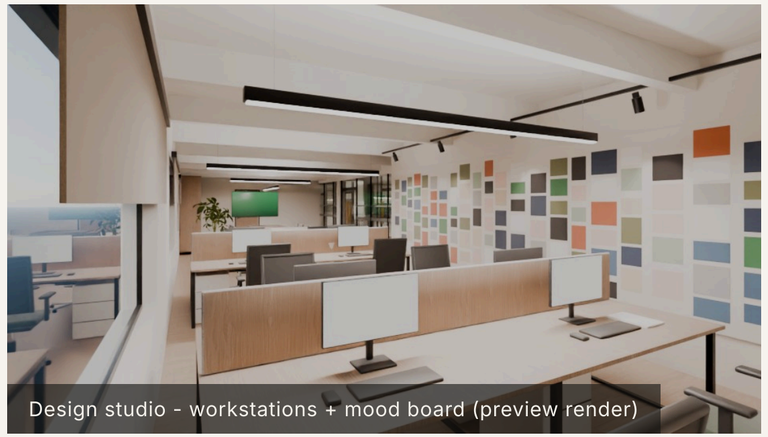

Design studio - workstations + mood board (preview render)

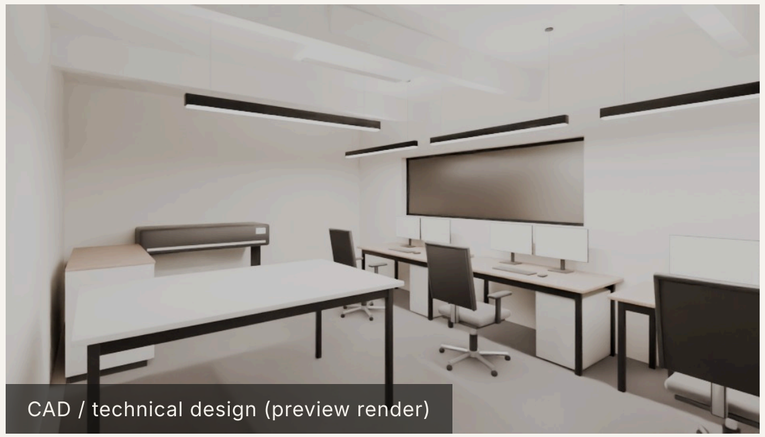

CAD / technical design (preview render)

KEY FINISHES



**WD-02**
Oak-look plank



**UP-01**
Green fabric



**WO-02**
Smoked walnut



**PA-01**
Warm white paint


SUPPORT SPACES

# Care for the people who make the product


Staff cafe + pantry (preview render)


Lounge / training (multipurpose) (preview render)


Prayer room (male) (preview render)

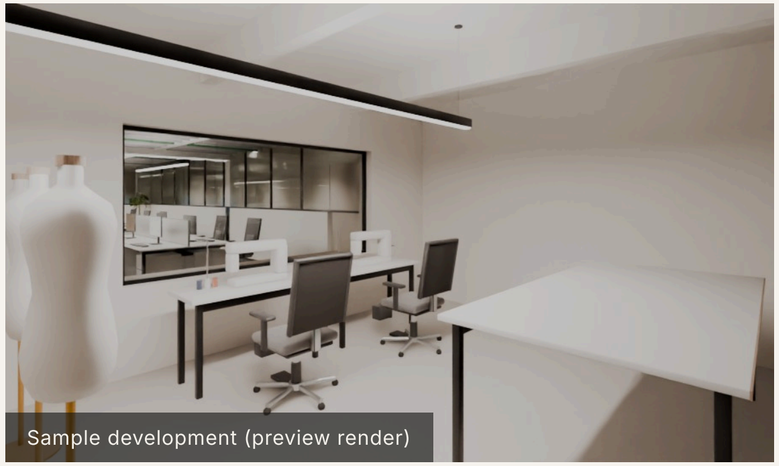
Sample development (preview render)


Fabric & trim library (preview render)



Staff washroom (preview render)

MATERIALS & FINISHES


# A warm, durable palette

| CODE | FINISH | WHERE |
|---|---|---|
| **TZ-01** | Terrazzo-look porcelain, warm beige | visitor floors |
| **WD-01** | Oak herringbone | boardroom, executive |
| **CP-01** | Charcoal carpet tile | offices |
| **WO-01** | White-oak slats on acoustic felt | feature walls |
| **WO-02** | Smoked walnut veneer | executive furniture |
| **PA-02** | Deep green from the logo | accents |
| **GL-01** | 12 mm glass, black aluminium | partitions |
| **MT-02** | Brushed brass | details |

Specification concepts; final products by sample approval. Full schedule in 04_DOCUMENTATION.

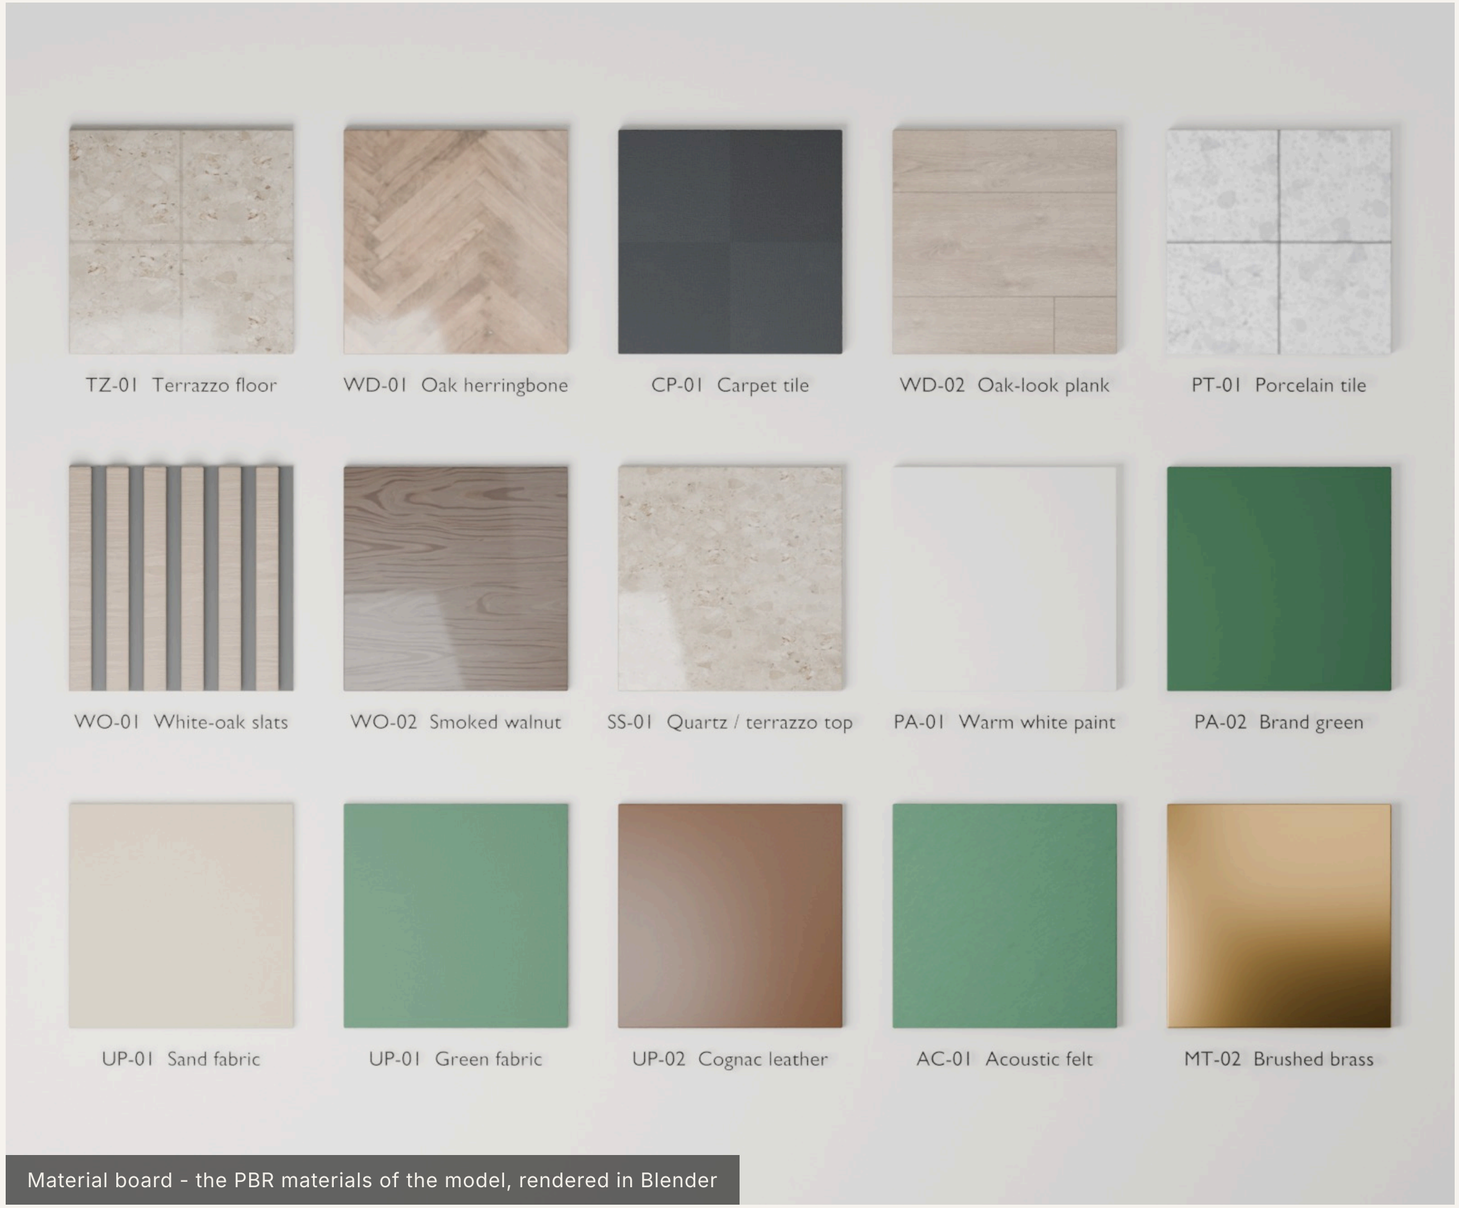


Material board - the PBR materials of the model, rendered in Blender

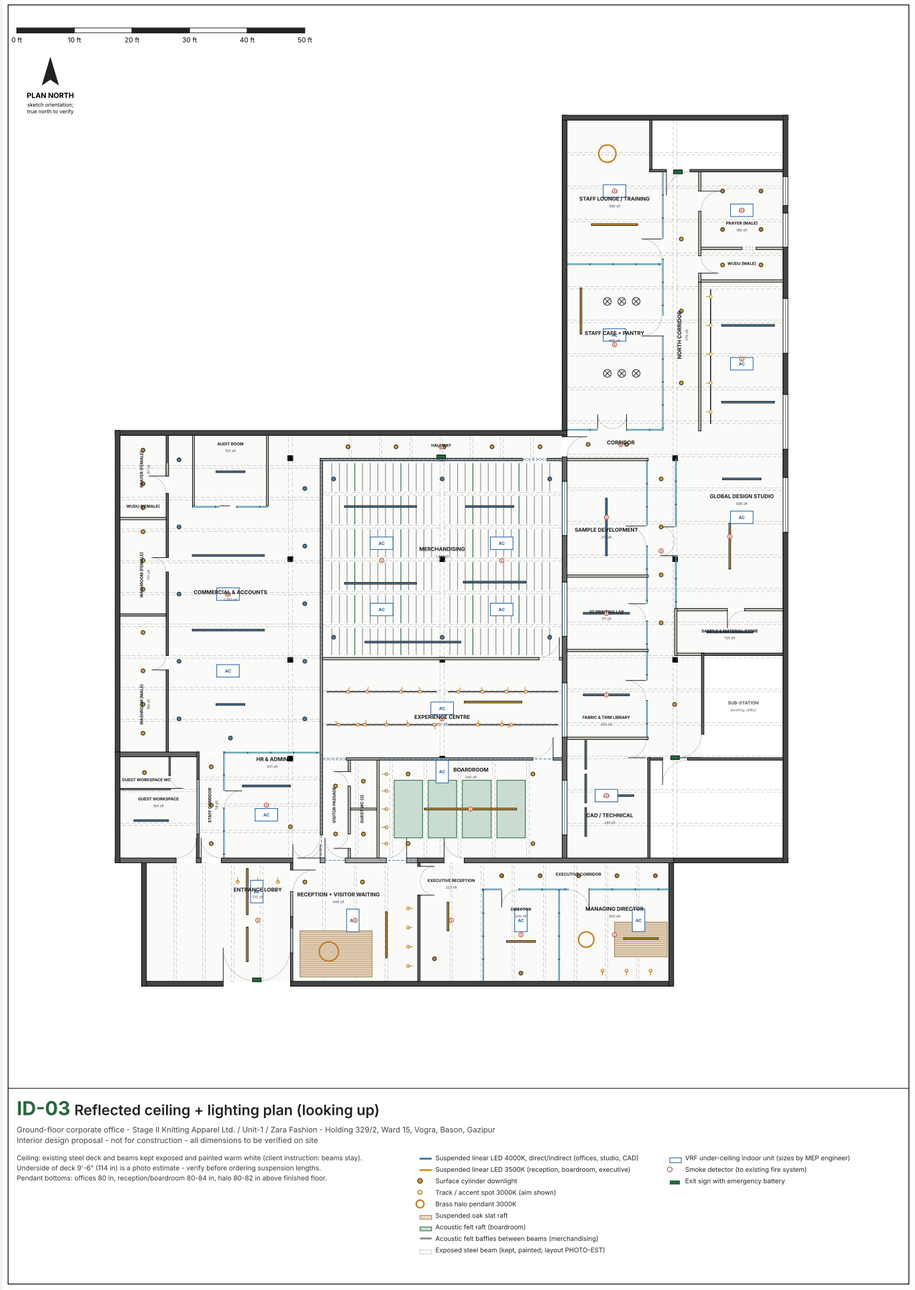


**ID-03** Reflected ceiling + lighting plan (looking up)

Ground-floor corporate office - Stage II Knitting Apparel Ltd. / Unit-1 / Zara Fashion - Holding 329/2, Ward 15, Vogra, Bason, Gazipur
Interior design proposal - not for construction - all dimensions to be verified on site

Ceiling: existing steel deck and beams kept exposed and painted warm white (client instruction: beams stay).
Underside of deck 9'-6" (114 in) is a photo estimate - verify before ordering suspension lengths.
Pendant bottoms: offices 80 in, reception/boardroom 80-84 in, halo 80-82 in above finished floor.

- Suspended linear LED 4000K, direct/indirect (offices, studio, CAD)
- Suspended linear LED 3500K (reception, boardroom, executive)
- Surface cylinder downlight
- Track / accent spot 3000K (aim shown)
- Brass halo pendant 3000K
- Suspended oak slat raft
- Acoustic felt raft (boardroom)
- Acoustic felt baffles between beams (merchandising)
- Exposed steel beam (kept, painted; layout PHOTO-EST)
- VRF under-ceiling indoor unit (sizes by MEP engineer)
- Smoke detector (to existing fire system)
- Exit sign with emergency battery

LIGHTING & CEILING

# The beams stay - and do the work

- Existing steel deck and beams kept exposed, painted warm white
- Experience centre: track lights fixed to the beams
- Boardroom: green felt rafts between the beams; merchandising: felt baffles
- Reception and MD office: oak slat rafts below beam level
- 4000 K direct/indirect light over desks; 3000-3500 K in visitor and executive areas
- Accent spots on products and brand walls; halo pendants



Felt rafts between the beams - boardroom

DESIGN BENEFITS

# What the company gains

## Operational efficiency

Departments placed by workflow: merchandising beside the experience centre and sample room, HR at the staff entrance, the studio next to CAD, library and samples.

## Professional image

A visitor sequence that presents the brand, the product and the management in one walk.

## Employee comfort


Ergonomic desks, acoustic control, daylight in the studio, cafe, lounge and prayer rooms.

## Flexibility

Bench desks, a multipurpose lounge / training room, glass partitions and about 50 % seat growth.

## Maintainability

Hard-wearing terrazzo and porcelain, replaceable carpet tiles, exposed services that stay accessible.

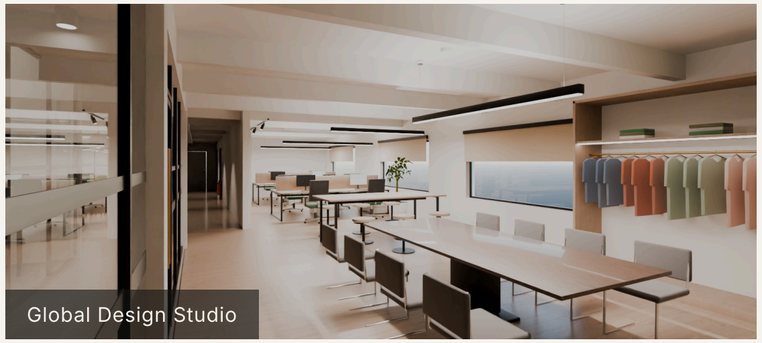

Global Design Studio

IMPLEMENTATION CONSIDERATIONS

# To confirm before construction

| ITEM | WHAT HAS TO BE CONFIRMED |
|---|---|
| **Site measurements** | Floor-to-deck height, room 8 width, column positions and beam layout (currently estimated). |
| **Structure** | Lintels for the new openings D17, D20, D22 and the lobby-reception glass - structural engineer. |
| **Fire & escape** | Ground-floor exits of the NE / SE stairs; without them the walk to the main gate is about 220 ft from the lounge. |
| **MEP** | VRF cooling, fresh air for windowless rooms, exhausts (WCs, pantry, 3D lab), power/data, UPS, DB location. |
| **Accessibility** | Ramp or lift at the two entrance steps; one accessible WC (door at least 36 in). |
| **Approvals & branding** | Fire / building approvals as applicable; trademark check for 'Global Design Studio'; signage from original vector logos. |

No budget or programme was supplied, so none is stated. Details: 04_DOCUMENTATION/technical_coordination_notes.md.


## RECOMMENDED NEXT STEPS

### 01
### Site measurement
Floor-to-deck height, room 8 width, columns and beams; then update the survey data, rebuild and re-verify the model.

### 02
### Engineering reviews
Structural check of the new openings, fire strategy and exits, HVAC, power and data design.

### 03
### Client decisions
Head count per department, interior budget, experience-centre content and approval of this layout.

### 04
### Detailed design
Construction drawings, finish samples, furniture selection and bill of quantities after approval.

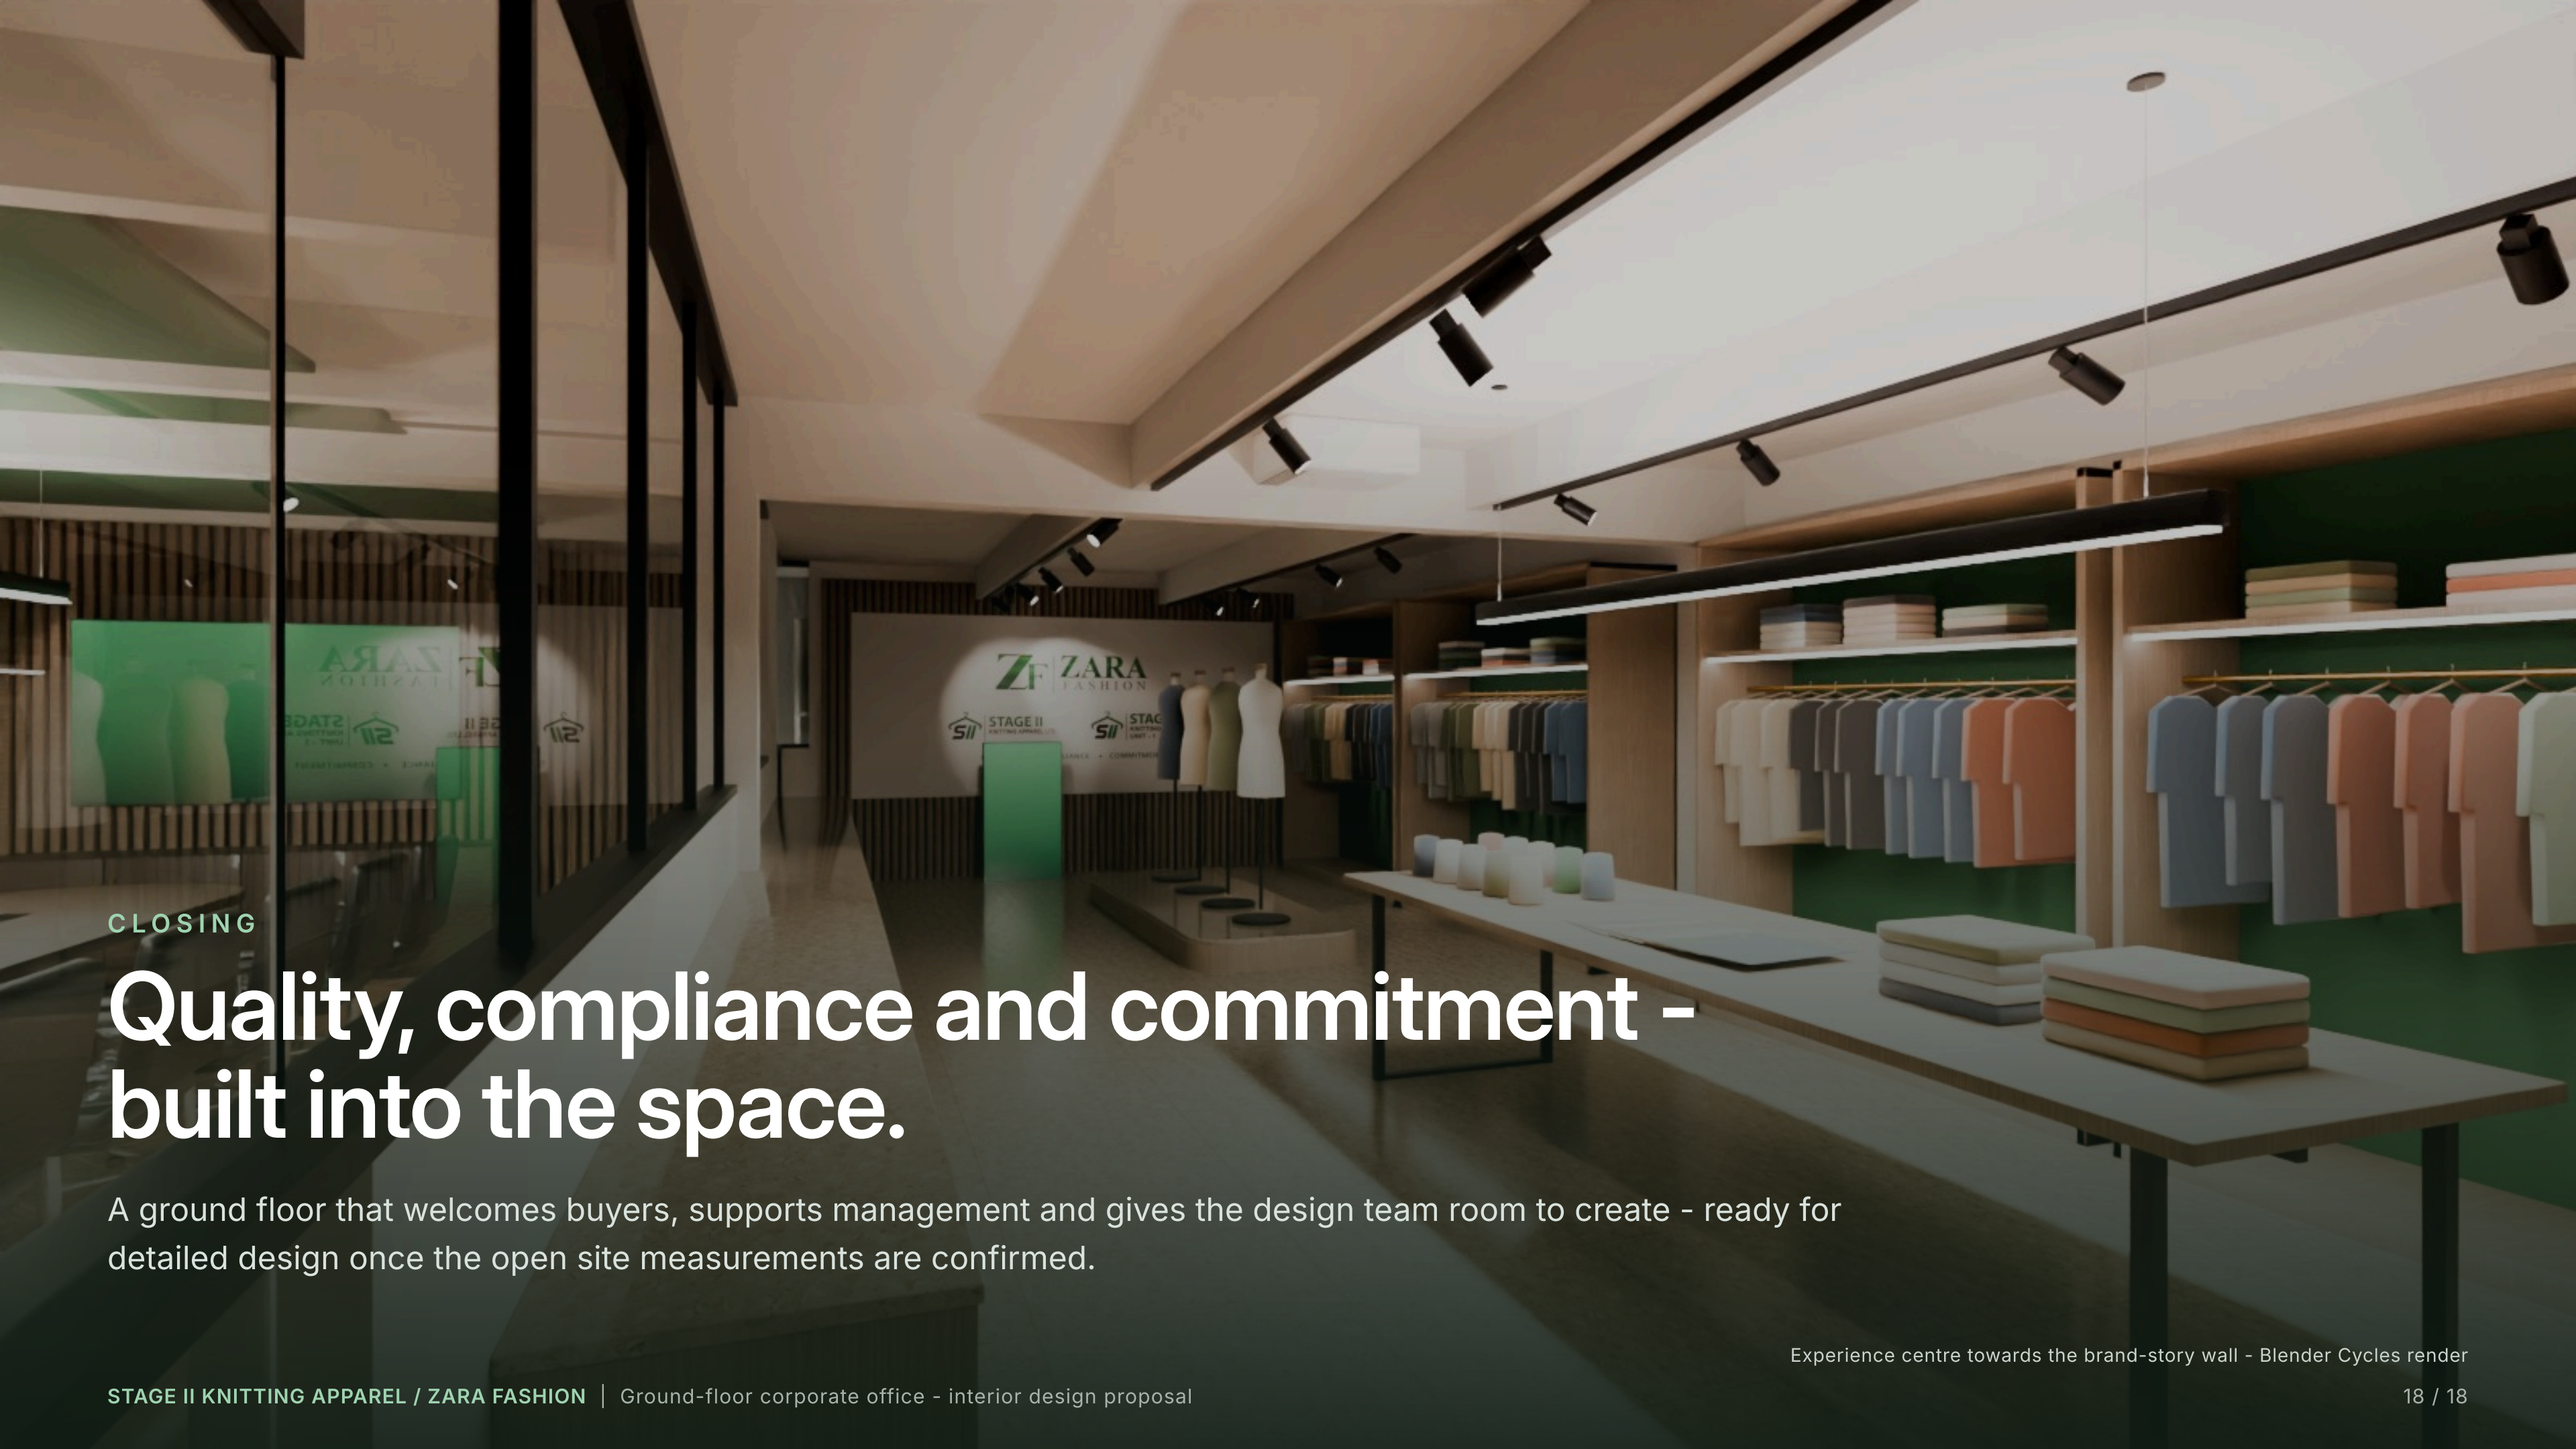


CLOSING

# Quality, compliance and commitment - built into the space.

A ground floor that welcomes buyers, supports management and gives the design team room to create - ready for detailed design once the open site measurements are confirmed.

Experience centre towards the brand-story wall - Blender Cycles render